ZEBEX
www.zebex.com

User's Manual

Windows CE.NET Handheld Computer

Editorial Record

Version	Date of edited	Page	Content
Ver 2.00	2009/3/2	9	Revise the picture of Package contents
Ver 2.00	2009/3/2	10	Revise the picture of Cradle Package
Ver 2.00	2009/3/2	11,12	Revise the picture Purchaseable accessories
Ver 2.00	2009/3/2	26~52	Adding the instruction of Using PowerPack
Ver 2.00	2009/3/2	53~56	Adding the picture of How to order
Ver 3.00	2010/1/25	26~49	Updated PowerPack Functions and pictures
Ver 3.00	2010/3/16	30~39	Adding GPRS User Manual
Ver 3.00	2010/3/19	1~26	Adding New Photo for Z-2065
Ver 3.00	2010/3/19	50~51	Updating Wifi setting section for summit
Ver 3.00	2011/8/19	13	Corrected General Guide
Ver 4.00	2013/7/23	41~61	Updated PowerPack section
Ver 4.00	2014/9/19	13	Corrected item 8 to SIM card slot

Table of Contents

Preface **4**
About This Manual 4
Copyright 5
Safety Information 6
Laser Safety 6
Safety Operation 6
WARNING 6
CAUTION 7
FCC Statement 8
FCC RF Radiation Exposure Statement 8
Unpacking **9**
Package Contents 9
Optional Parts 10
Cradle package 10
Purchasable Accessories 11
General Guide **13**
Getting Started **15**
Inserting the Battery 15
Remove the Battery 15
Charging the Battery 16
Charging by cable 16
Charging by cradle 16
Cradle LEDs 17
Charging the battery separately in the cradle 17
System Reset 19
Using the Warm reset function 19
Using the Cold reset function 19
PC System Requirements 20
Connecting To a PC 20
Connecting via the RS232 20
Connecting via USB Cradle 21
Inserting SD Card 22
Remove the SD Card 22

About The Product 23
Prerequisites 23
Hardware Required 24
Specifications 24
Using Barcode Scanner 26
Scanning Barcodes 26
Using RFID Scanner (Optional) 27
Scanning RFID 27
RFID Scanning Position 27
To scan a RFID 28
Reading UID 28
RW 15693 29
RW Mifare 30
UltraLight 31
Terminal GPRS User's Guide 32
Make New Connection 32
Set Connection Properties 34
Phone Number 36
Set Dial Properties 37
Connect to GPRS Service 39
Disconnect GPRS Service 40
Using the Zebex PowerPack 41
Backlight 41
Calculator 43
File Transfer 44
Ex. File Transferred Operation By Using Bluetooth 45
Function Key Manager 47
Function Key Manager Set Up Instruction 48
GPS Information 51
Preload Manager 52
Preload Operation 53
RFID 55
Switch 56
Scan Manager 58
Backup/Restore 61
Firmware Information 62
How to order 64

Preface

About This Manual

Thank you for your purchase of the ZEBEX Z-2065 series handheld computer. ZEBEX Z-2065 series product is at the forefront of handheld computer technology, and this manual will provide the necessary information on the many and varied options available to you.

The Z-2065 series product is a compact, ergonomic and durable handheld computer. It is designed with an integrated 802.11b/g wireless communication, 1D/2D barcode scanner, touch screen and 29-keys keypad. The design is complies with IP64 regulations and ideal for the mobile worker as it simple and easy to use anywhere along a supply chain.

Symbols used in this manual

	A triangular shape indicates you should exercise caution.
	A circle shape indicates something you should not to do.
	A black circle indicates something you must to do.
	A note symbol indicates you the information that is important and you should be observed.

Copyright

ZEBEX Industries Inc. makes no warranty of any kind with regard to this material. Including but not limited to the imply warranties of merchantability and fitness for a particular purpose. ZEBEX Industries Inc. shall not be liable for errors contained herein or for incidental consequential damages in connection with the furnishing, Performance or use of this product.

ZEBEX Industries Inc. will be under no liability in respect of any defect arising from fair wear and tear, willful damage, negligence, abnormal working conditions, failure to follow the instructions and warnings, or misuse or alteration or repair of the products without written approval.

No part of this document may be reproduced, transmitted, stored in a retrieval system, transcribed or translated into any language or computer language in any form or by any means electronic, mechanical, magnetic, optical, chemical, manual or otherwise, with express writ- ten consent and authorization.

We reserve the right to make changes in product design without reservation and without notification. The material in this guide is for information only and is subject to change without notice.

ZEBEX is a registered trademark of ZEBEX INDUSTRIES INC.

© Copyright 2014 ZEBEX.

Safety Information

Your safety is of the utmost importance so please observe and follow the following guidelines that allow you to use the scanner in a safe and responsible way.

Laser Safety

The Z-2065 series handheld computer complies with safety standard IEC825-1(1993) for a Class 2 laser product. It also complies with U.S.21CFR1040 as applicable to a Class II laser product. Avoid staring at direct laser light as the laser beam may hurt your eyes.

LASER BEAM

Never look directly into the laser beam. Doing so can cause serious eye damage.

Safety Operation

WARNING

Disassembly and Modification

Never try to disassemble or modify the device in any way. All servicing should be carried out by qualified Zebex personnel or Zebex- approved engineers.

Interior Parts and Components

Never touch interior high voltage parts or components. Doing so creates the danger of electrical shock.

Drop and Knock the Device

Be careful when using the device; do not drop or knock the device as irreversible damage to the unit may occur.

Extreme temperature

Do not operate the device under extreme temperature.

Battery and Charger

The use of third-party battery or charger may either damage the device or shorten the life of the device.

CAUTION

Dropping and Damage

Should the drop the device and damage it, immediately turn off the power and contact your original dealer or an authorized ZEBEX service provider. Continued use creates the danger of fire and electrical shock.

Abnormal Conditions

Should the device become hot or start to emit smoke or an original dealer or an authorized ZEBEX service provider. Continued use creates the danger of fire and electrical shock.

Foreign Objects

Should any foreign matter ever get into the device, immediately turn off the power and contact your original dealer or an authorized ZEBEX service provider. Continued use creates the danger of fire and electrical shock.

Moisture

Keep the device away from vases, planters, cups, glasses and other containers of liquid. Also keep it away from metal. Water and metal getting into the device creates the danger of fire and electrical shock.

FCC Statement

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in the accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RF Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

Unpacking

Package Contents

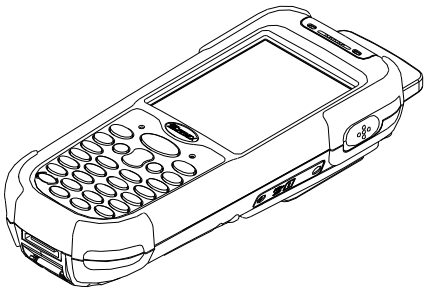

Z-2065 series
Mobile Data Terminal



AC Adapter



Stylus Pen

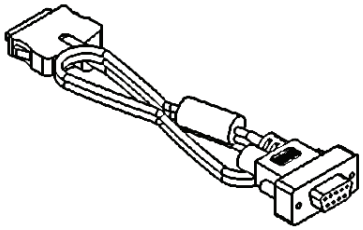

RS-232 DB9 (F) Cable



Hand Strip



USB cable
(Terminal connect to PC USB port)



Hand strip Holder

Battery Pack



Sling for stylus Pen

Optional Parts

Cradle package



Docking Cradle

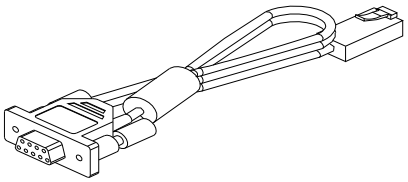

RS232 cable



AC Adapter

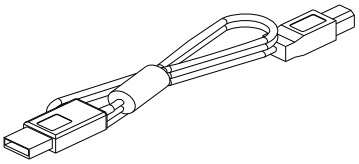

USB cable
(Cradle to USB)

Purchasable Accessories

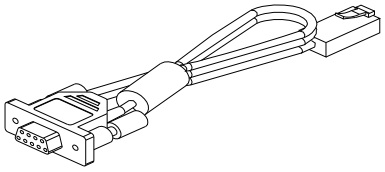

RS232 Cable



AC Adapter

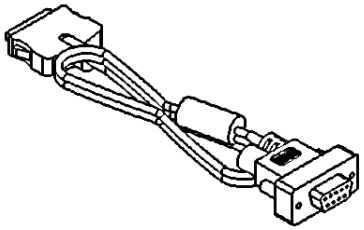

RS-232 DB9 (F) Cable



Britain Plug head

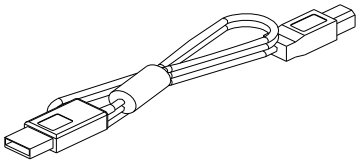

USB cable (Cradle to USB)



U.S. Plug head



Battery Pack



Australia Plug head



Stylus Pen



Europe Plug head



Hand Strip for stylus Pen



Sling for stylus Pen



Hand strip Holder

General Guide

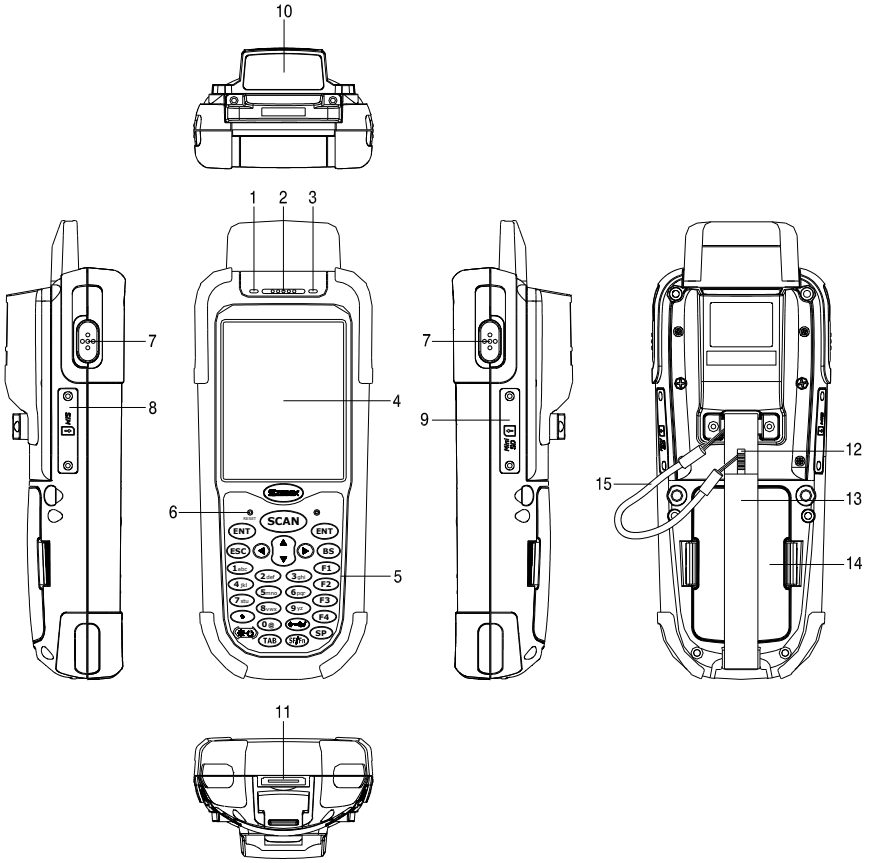

1	LED indicator	Indicates the status of read bar code or battery charge : Green for successful read barcode or full charge of battery. Red for battery just on charging.
2	Buzzer	Outputs operation confirmation tones.
3	LED indicator for WI-FI	Flashes in red when operating via WLAN communication
4	LCD screen	Display various data when a program is being run.
5	Stroke keys	A total of 29 keys are provided to turn power ON or OFF and other operations.
6	Reset switch (inside the hole)	Use reset needle (take off the other side of stylus pen cover) to press the RESET switch located inside the hole.
7	Scan button	For Barcode reading.
8	SIM card slot	For GPRS SIM card
9	Mini SD I/O card slot	Install the Mini SD I/O card
10	Scan windows	Emits a laser for bar code reading.
11	RS-232 port	This port is for RS-232 communication with PC
12	Stylus pen	For touch screen operation and press RESET switch.
13	Hand strip	Protects the Handheld Terminal to drop.
14	Battery	Main battery
15	Sling	Sling for stylus pen

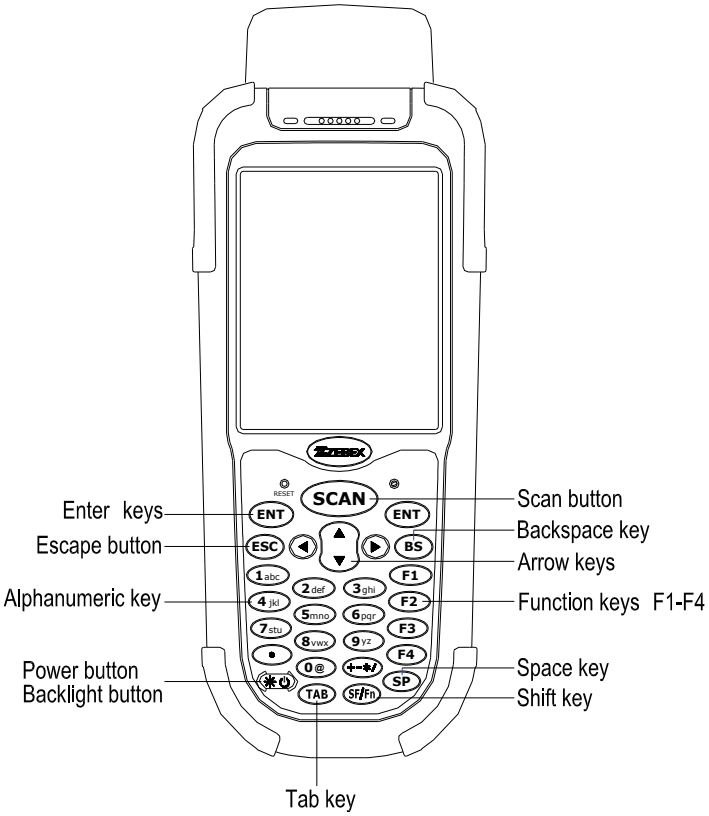

Arrow	Arrow keys	Press these to move around the screen.
ENT	Enter key	Press to confirm entries or commands.
0-9	Alphanumeric keypad	Press to enter numerical or alphabetical data.
F1-F4	Function keys	Press to access function keys 1-4.
BS	Backspace key	Press to move cursor and deletes the previous character each time.
	Power/Backlight on key	1. Press to turn the power on. 2. Press more then 3 seconds for turn the terminal power off and go into the suspend mode. 3. Press to turn the LCD backlight on when it is off.
ESC	Escape key	Press to perform a cancel action.
SCAN	Scan key	Press and hold to scan a barcode.
SF/Fn	Shift key	The key is used in combination with other keys to type special characters or perform other function keys. 1. Press after SF/Fn key and press Up key to turn the input method into upper alphabetical. 2. Press after SF/Fn key and press Down key to turn the input method into lower alphabetical. 3. Press after SF/Fn key and press Left or Right key to turn the input method into numerical. 4. Press after SF/Fn key and press F1-F4 key to perform F5 - F8 key.
TAB	Tab key	Press to add a tab indention.
SP	Space key	Press to add a space character.

Getting Started

Inserting the Battery

Insert the battery pack as shown and watch the battery direction.

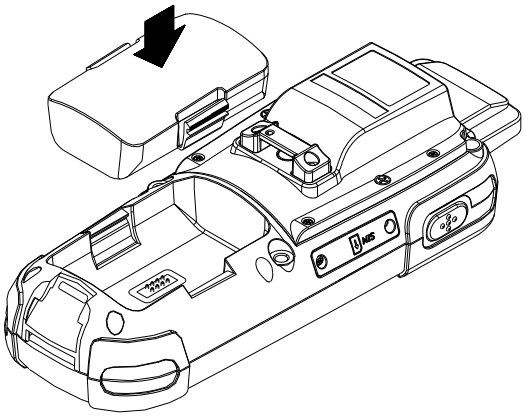

Remove the Battery

Push the side lock to pick up the battery pack.

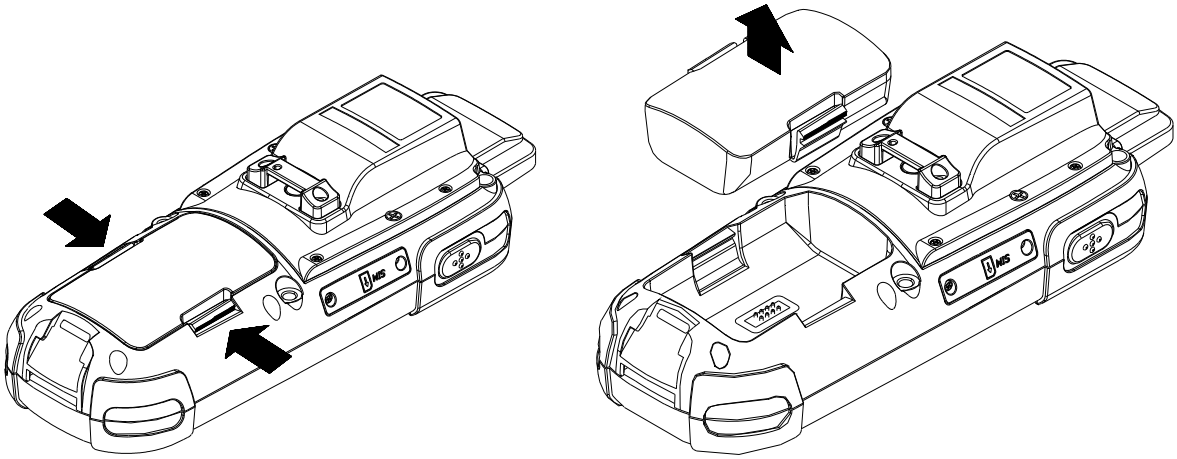

Charging the Battery

The Li-ion rechargeable battery can be charged while inserted in the device itself or independently via the recharging slot at the back of the cradle.

Charging by cable

Connect the charging cable and AC adaptor as shown.

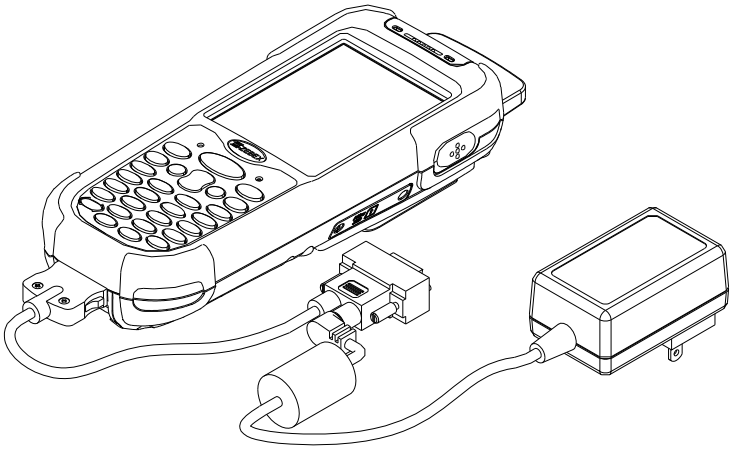

Charging by cradle

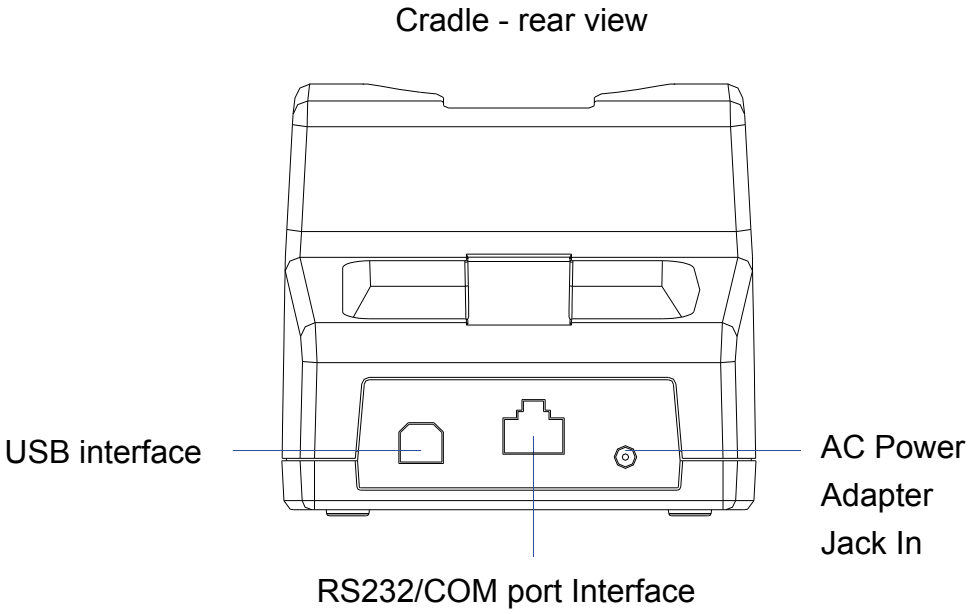

Cradle - front view

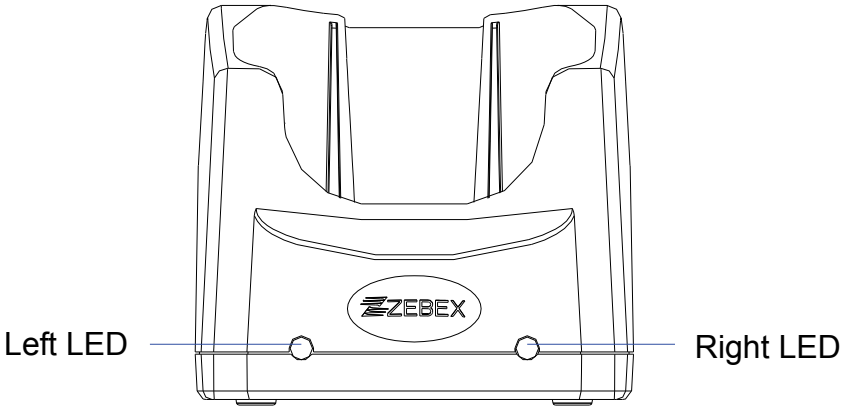

Cradle LEDs

- Left LED - The LED lit when a battery is inserted into the rear battery slot of the cradle for recharge. It remains lit until the charge is complete.
- Right LED - The LED lit when the cradle is connected to AC power.

Charging the battery separately in the cradle

Insert the battery into the compartment at the rear of the cradle.

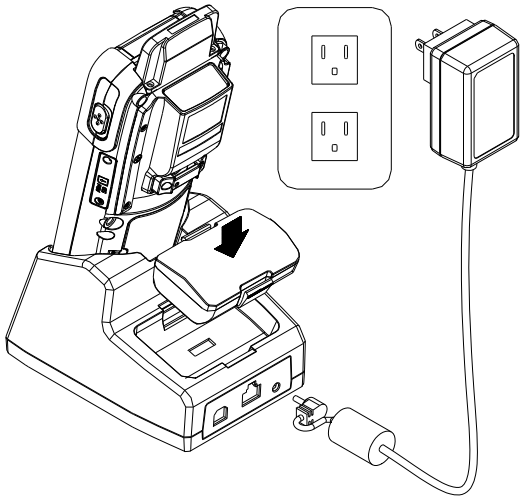

Connect the power jack to the cradle and plug AC adapter into the socket.

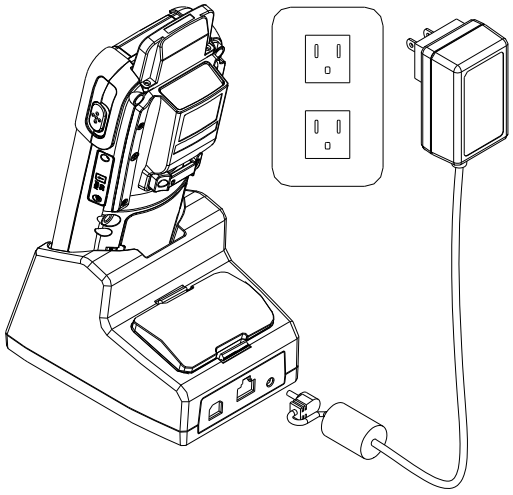

NOTES

When charging the battery for the first time, charge for at least 12 hours prior to use.

System Reset

Using the Warm reset function

Warm reset function allows you to return the device to the default settings, while not wiping all data from the memory.

Insert the needle into the reset hole as shown and press down gently, to reset the device.

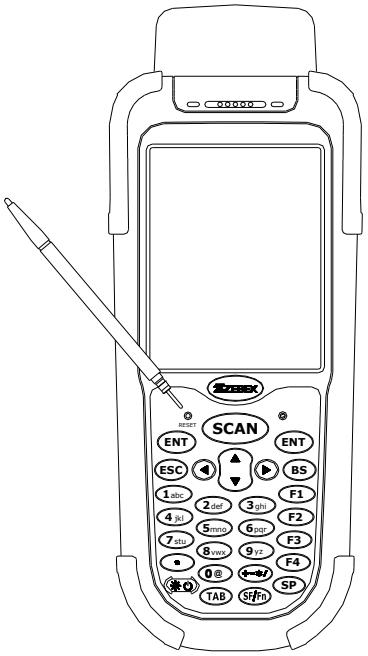

Using the Cold reset function

Cool reset function allows you to return the device to the factory settings, while wiping all data from the memory.
Press down and hold the power key and Insert the needle into the reset hole to cold reset the device.

WARNING

Cold reset will erase ALL pre-configured data on the scanner. Check carefully to make sure you have uploaded all important files to your PC before proceeding with the reset.

PC System Requirements

Windows XP Operating System
64 MB RAM
50 MB free HDD space
Interface : USB / RS-232 ports
WLAN transmitter (optional)
Bluetooth transmitter/receiver (optional)

Connecting To a PC

In order to use the software supplied with the Z-2065, the mobile data terminal must be connected to a PC.

Connecting via the RS232

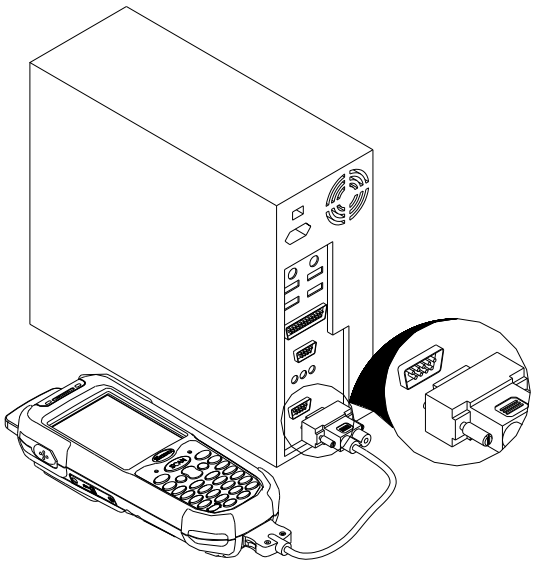

Connecting via USB Cradle

The cradle must also be connected via one of your PC's USB ports. Attach one end of the cable to the USB interface on the cradle and the other to your PC.

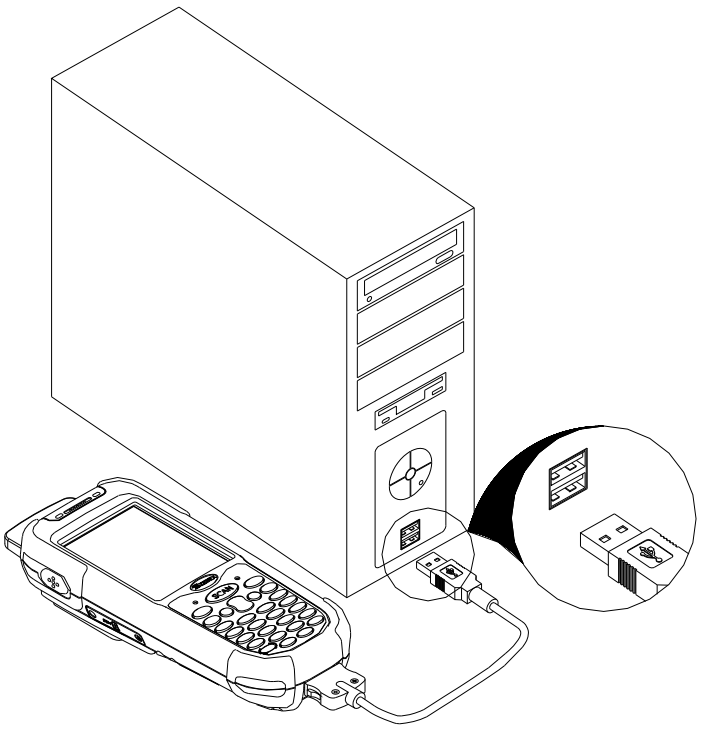

Inserting SD Card

1. Make sure the power is turn off.
2. Open the SD Slot cover as shown, Insert the SD card.
3. Close the SD slot Cover.

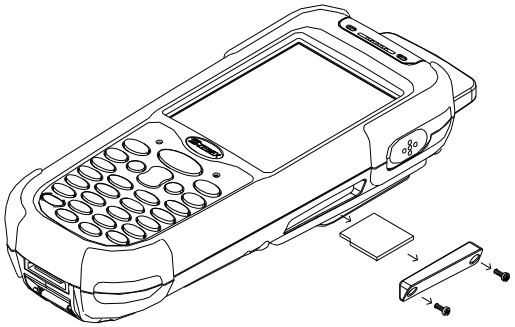

Remove the SD Card

1. Make sure the power is turn off.
2. Open the SD Slot cover as shown, Take off the SD card.
3. Closed the SD slot cover.

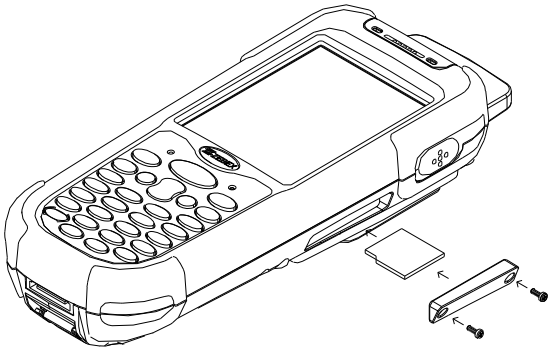

About The Product

ZEBEX Z-2065 WinCE.NET Handheld Computer comes with the one and only Jacket-module design, and makes most user friendly features to select as desired. The Jacket-module is a module at the back of device that is selectable in GPRS, GPS, RFID, WLAN or Bluetooth communications and 1D or 2D scanning engine, it satisfies all application from indoor to outdoor and from warehouse to transportation logistics. Z-2065 qualifies to use in most difficult environments with its rugged design with IP64 standard.
Further more, its round shape back design allow it to sit in palm fitly for best operation comfort, and for future expansion, it has a gun grip design to broaden its application into more categories. Z-2065 has an unbeatable technology and ergonomic design that upgrades your with power.

Prerequisites

Skills Required

The following skills are required by developers aiming to develop application software for the ZEBEX Z-2065 series.

- Windows programming
- Good knowledge of one or more of the following:
  * Visual C++
  * Visual Basic .NET
  * Visual studio .NET
  * Visual C#
  * Active Server Pages and web programming

The following skills or experiences are also desirable.

- Windows CE devices
- ActiveSync
- Some networking experience.

Hardware Required

The following models of the ZEBEX Z-2065 series and the dedicated options are available.

Available models and the features:

	Model	P/N (device only)	P/N(include accessory)	WLAN & BT(WL)	Barcode		GPRS(G)	GPS(S)	RFID(H)
					1D	2D(SE4500)	2.5G		HF
1	Z-2065WL1	882-65W100-000	882-65W100-100	◆	◆				
2	Z-2065WL2	882-65W200-000	882-65W200-100	◆		◆			
3	Z-2065W1GS	882-65W1GS-000	882-65W1GS-100	◆	◆		◆	◆	
4	Z-2065W2GS	882-65W2GS-000	882-65W2GS-100	◆		◆	◆	◆	
5	Z-2065W1GSH	882-65G1SH-000	882-65G1SH-100	◆	◆		◆	◆	◆
6	Z-2065W2GSH	882-65G2SH-000	882-65G2SH-100	◆		◆	◆	◆	◆
7	Z-2065W1G	882-65W1G0-000	882-65W1G0-100	◆	◆		◆		
8	Z-2065W2G	882-65W2G0-000	882-65W2G0-100	◆		◆	◆		
9	Z-2065W1S	882-65W1S0-000	882-65W1S0-100	◆	◆			◆	
10	Z-2065W2S	882-65W2S0-000	882-65W2S0-100	◆		◆		◆	
11	Z-2065W1H	882-65W1H0-000	882-65W1H0-100	◆	◆				◆
12	Z-2065W2H	882-65W2H0-000	882-65W2H0-100	◆		◆			◆

Specifications

Model	Z-2065 series
System	
CPU	Inter PXA 270 processor (Max. 520MHz)
RAM	128 Mbyte
F-ROM	64 Mbyte
LCD Display	3.5”, QVGA 240 X 320 TFT color panel with touch screen
Operating System	Microsoft Windows CE.NET 5.0
Power Management	
Main Battery	3.7V5,000mAH Li-ion rechargeable battery
3.7V 2,200 mAH Li-ion rechargeable	3.7V, 120mAH, Li-Poly rechargeable battery
Battery Life	8 hours (without wireless communication activated)
Scanning Performance	
Scan Engine	Symbol SE-955 1D laser engine Symbol SE-4400 2D image engine (optional)
Light Source	650 nm visible Laser Diode

Scan Rate	100 scans per second
Print Contrast	30% @ UPC/EAN 100%
Decoding Capability	
Barcode Symbologies	UPC/ EAN/ JAN, Code 128/EAN 128, Code 39, Code 93, Interleaved 2 of 5, Discrete 2 of 5, Codabar, MSI/Plessey
Card Slots	1 x Mini SD I/O card
Communications / Interfaces	
Bluetooth	Bluetooth Class 2
IrDA	Standard IrDA 1.3
USB	USB 2.0
RS-232	Programmable up to 115,200 bps
WLAN	802.11b/g (optional)
Dimensions	190.5 mm (L) x82..8 mm (W) x 50.5 mm (H)
Weight	Approx. 480 g (battery included)
Environmental	
Operating Temp.	0°C ~ 50°C
Storage Temp	-10°C ~ 60°C
Operating Humidity	10% ~ 70% (non-condensing)
Storage Humidity	5% ~ 70% (non-condensing)
Drop Durability	Withstand 1.2m (4 feet) drop to concrete
Environmental Sealing	IP64 rated sealing
Regulatory Approvals	CE & FCC Part 15B, 15 C,CE RF,LVD,ESD
Cradle	Single slot USB / RS-232 charging cradle with spare battery slot
Software &Development	Microsoft VC 6.0 development environment Supports SDK for program development

Using Barcode Scanner

Scanning Barcodes

The Z-2065 is a highly versatile tool that can scan a wide range of barcodes but it is imperative that it is used in the correct manner.

To scan a barcode:

1. Hold the Z-2065 horizontally and point it directly at the barcode you wish to scan.
2. Once in the correct position, press the SCAN button.

An audible alarm is heard and the barcode digits will appear on the LCD screen if the scan is successful.

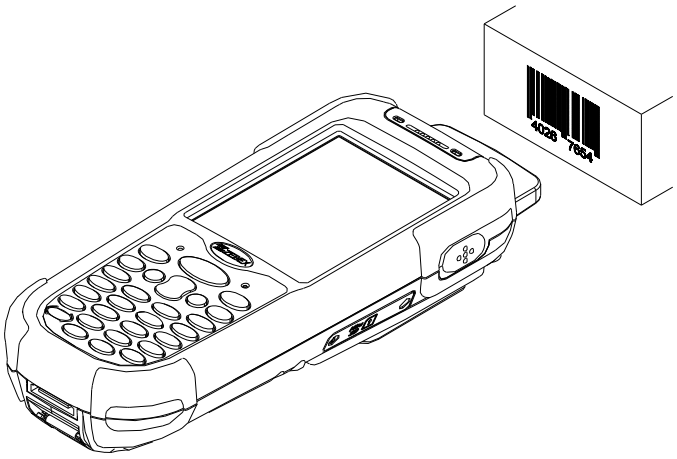

Using RFID Scanner (Optional)

Scanning RFID

To open RFID demo program, you can find the program located in the Programs/PowerPack.

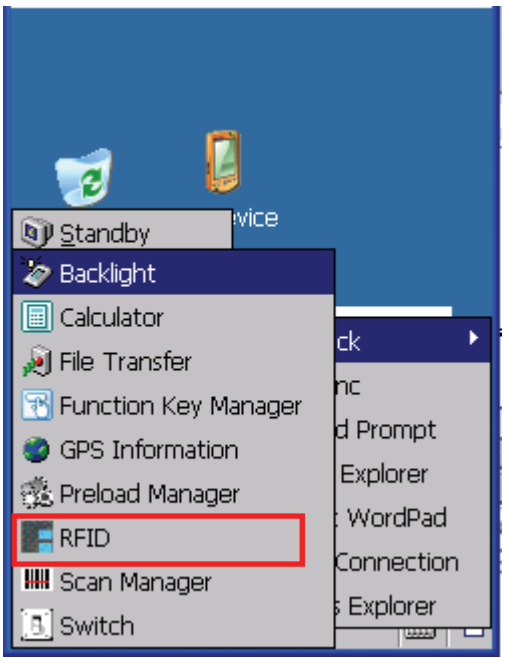

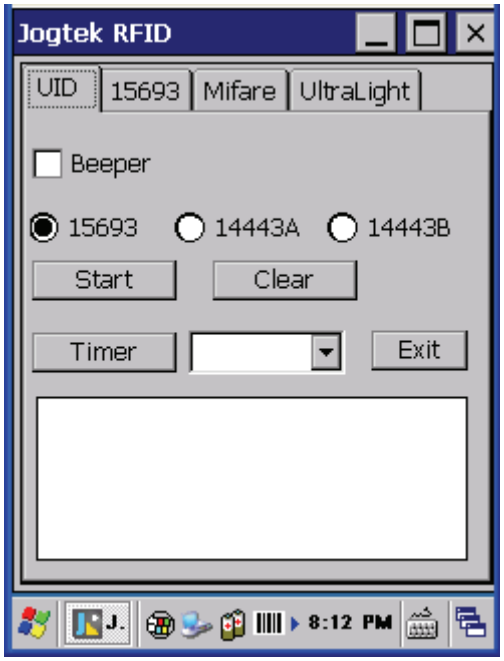

RFID Scanning Position

RFID scan module was installed in the back of terminals. The devices can read from 30 to 50mm distance from the back-side of terminals.

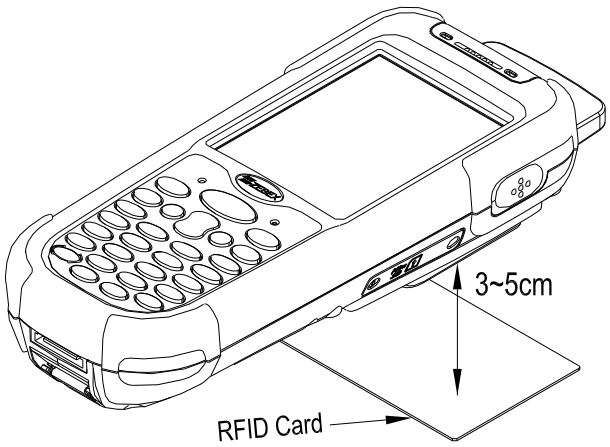

To scan a RFID

After opening RFID demo program, you will see main menu displayed as below. There are three main functionalities such as “UID”, “15693”, “Mifare” and “UltraLight”. Please follow below steps to read UID.

Reading UID

1. Select UID type, then confirm by pressing “Start” button. Demo program provide three UID types such as 15693, 14443A, and 14443B.
2. User can also adjust scanning rate by selecting how many msec for scanning once. Then confirm by clicking “Timer” button.
3. After scanning UID, it will be shown on column at the bottom of display. Data in column can be clear by pressing “Clear” button.
4. If user need to switch to another UID type, UID type by can be cancel by pressing “Stop” button. Then user can select another UID type as demand.

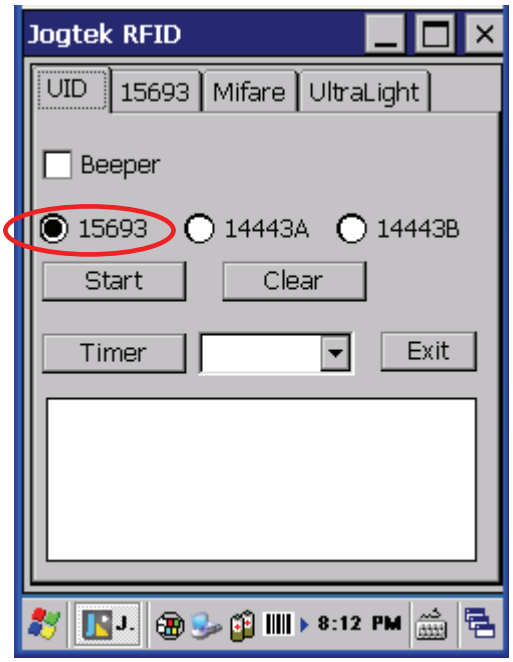

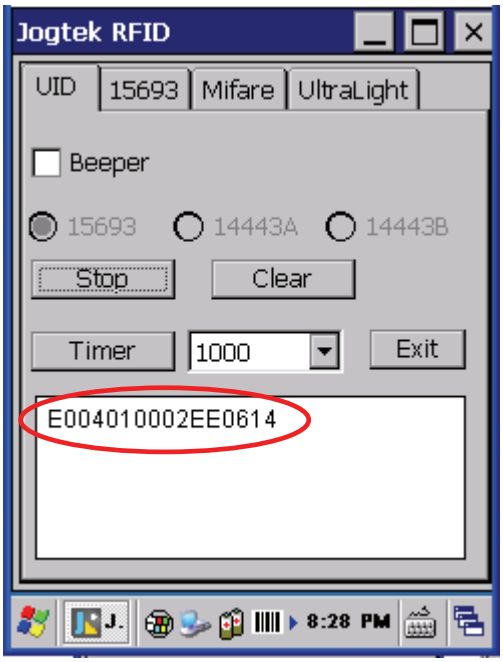

RW 15693

On 15693 function window, user can read and write information from RW 15693 UID card:

1. Set up protocol by pressing “SetProtocol” button, place UID card within valid range and press “CheckUID” button. The UID will display in the red circle of below diagram.
2. To read data from certain Block, first input the location in column next to Read Block. Then confirm by pressing “Read Block” button. Read Data will appear in column showed in green circle of below diagram.
3. To write UID from certain Block, first input the location in column next to ”Write Block” button, then write the data into the longer column in blue circle. Confirm written data by pressing “Write Block” button.
4. Information appear at bottom can be clear by pressing “Clear” button.

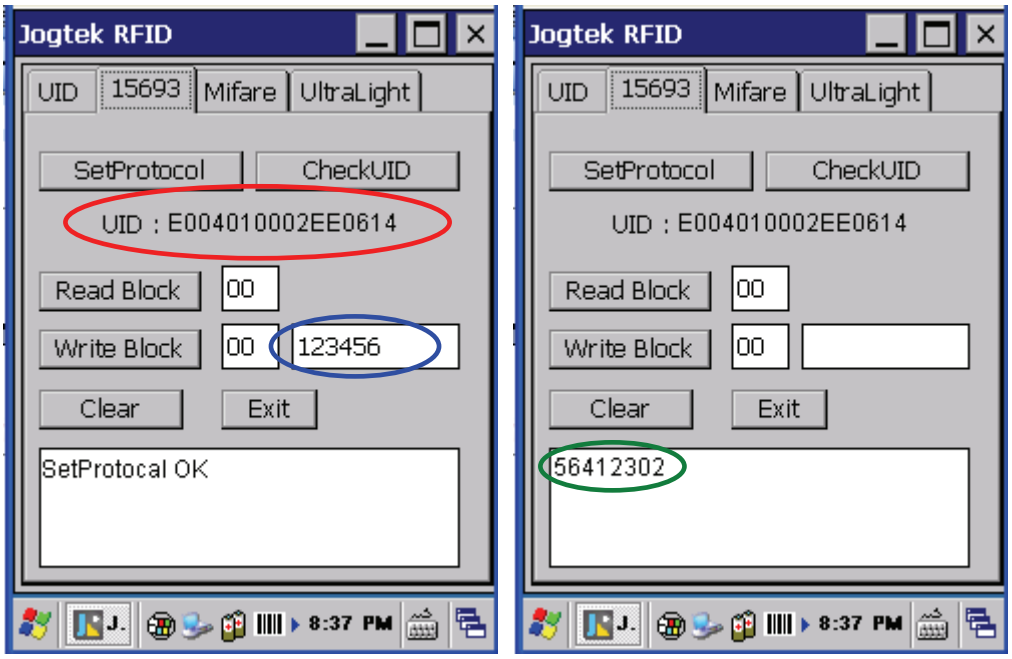

RW Mifare

On RW 15693 function window, user can read and write information from Mifare UID card:

1. Place UID card within valid range, check UID by pressing “Open Card ” button. UID will display in red circle shown in below diagram.
2. To perform read and write commands, please refer to “RW 15693” sections.

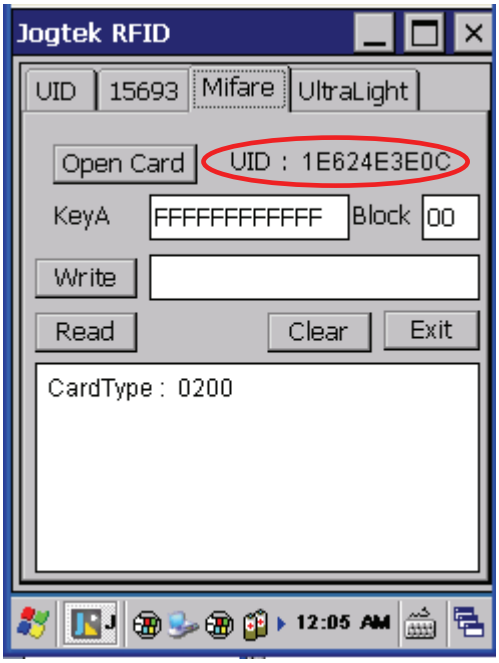

UltraLight

On UltraLight window, user can read and write information from UltraLight UID card:

1. To read data from UID card, press the “Read” button. Read Data will appear on the screen.
2. To write UID card, write the data into the column next to the “Write” button. Confirm written data by pressing “Write” button.

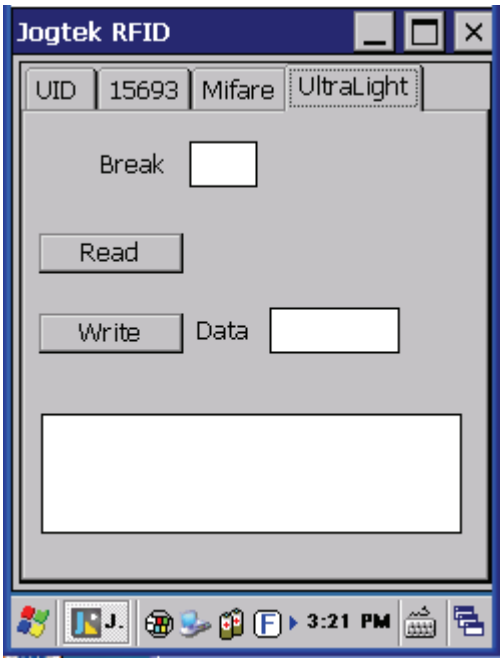

Terminal GPRS User's Guide

Make New Connection

1. Click "Network and Dial-Up Connections" in the settings. Show as below figures.

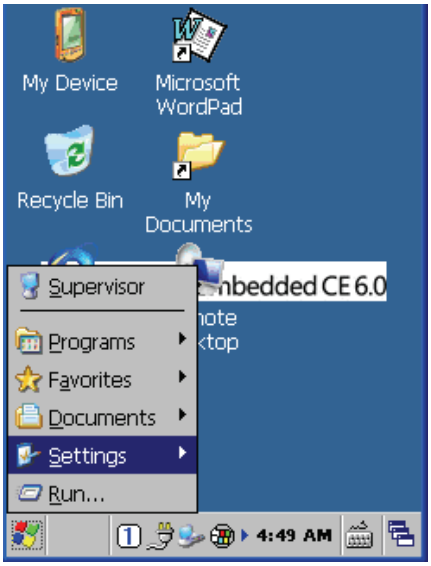

2. Click "Make New Connection" to create the new connection. Show as below figures.

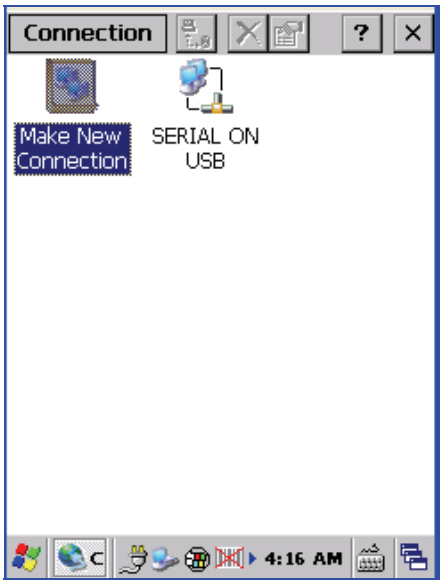

3. Select the “Dial-Up Connection” and press” Next” button to make anew connection. Show as below figure.

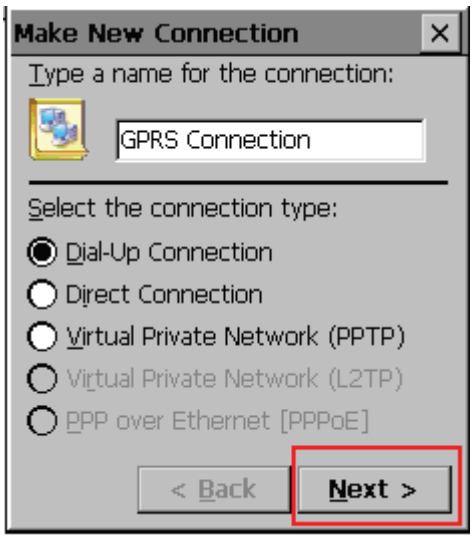

4. Press “Next“ button to select the modem.

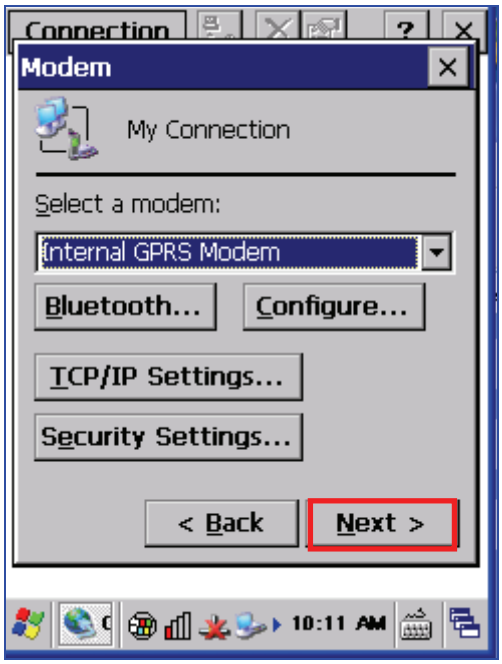

Set Connection Properties

1. Select Internal GPRS Modem and press the “Configure” button to change the settings of properties.

2. Change the Baud Rate to 115200 in Port Settings. Show as below figure.

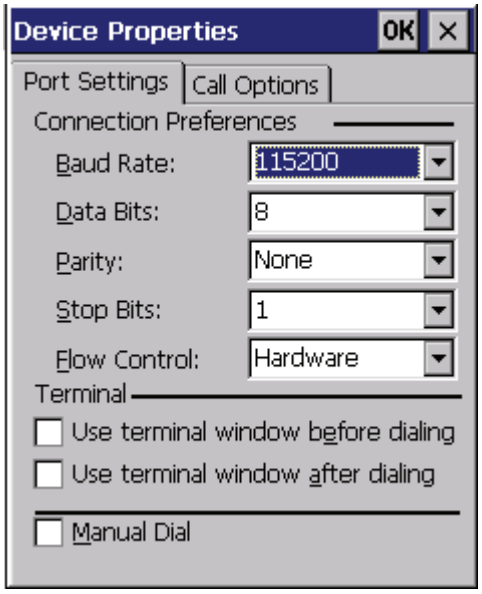

3. Input the dial string in Call Option. Show as below figure. Input +CGDCONT=1,"IP","APN" to set the APN for GPRS connection. For the setting of known APN around the work, please refer below link: http://www.quickim.com/support/gprs-settings.html

4. Press "OK" button to complete the settings.

5. Press "Phone Number" button to set the phone number.

Phone Number

1. Set phone number to *99# or *99***1#. This number depends on the service provider. Show as below figure.

2. Press OK button to finish the settings of new connection.

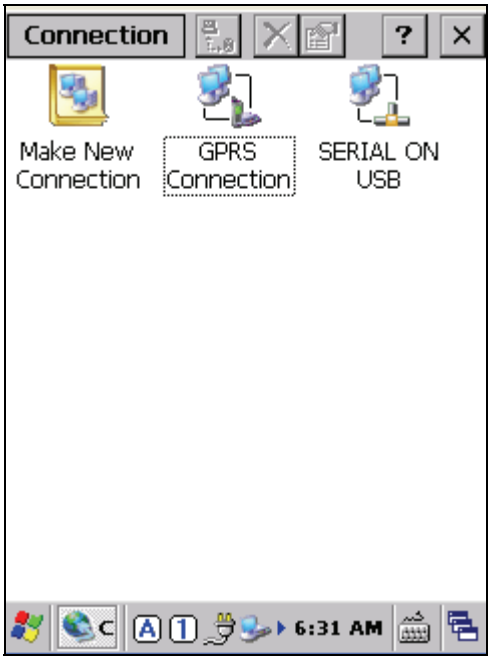

Set Dial Properties

1. Double Click the connection.

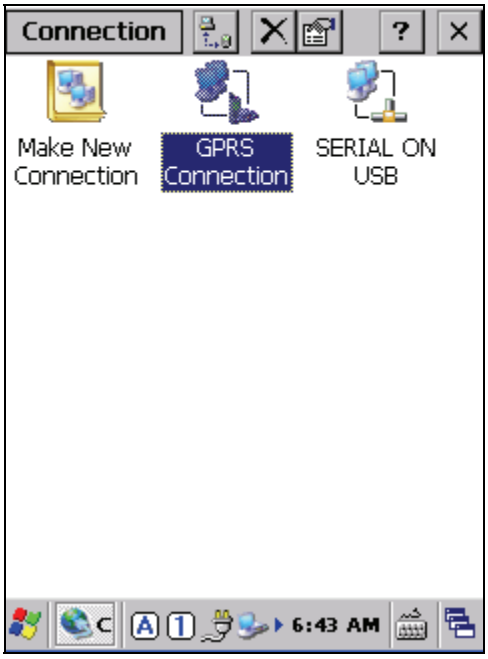

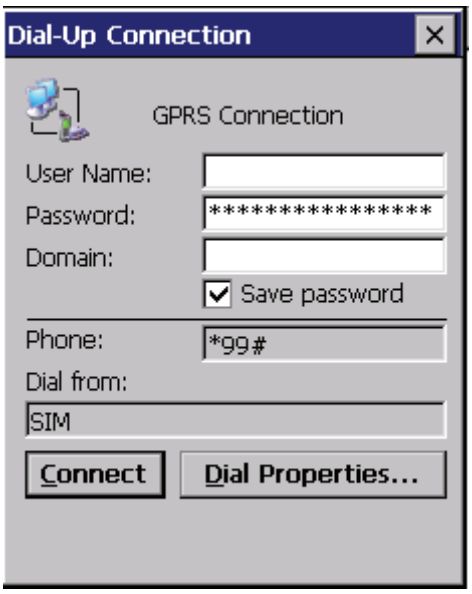

2. Press the “Dial Properties” button.

3. Create new one or select one setting in the Location and press the “Edit” button.

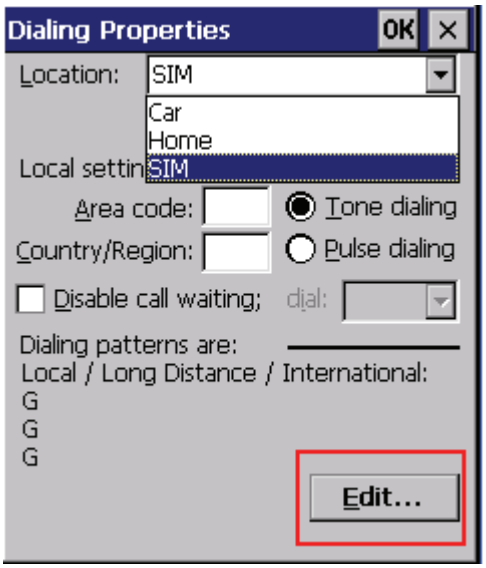

4. Set the Dialing Patterns as below figure.

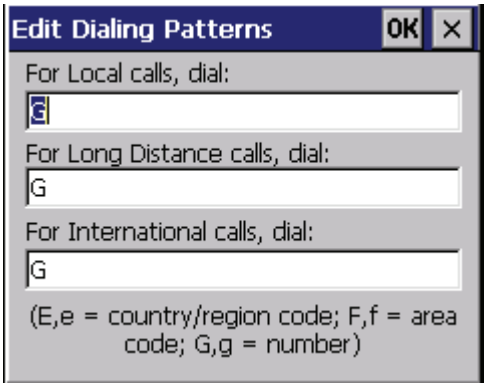

Connect to GPRS Service

1. Press the “Connect” button.

2. During the Dial-Up. The screen shows the status as below figure.

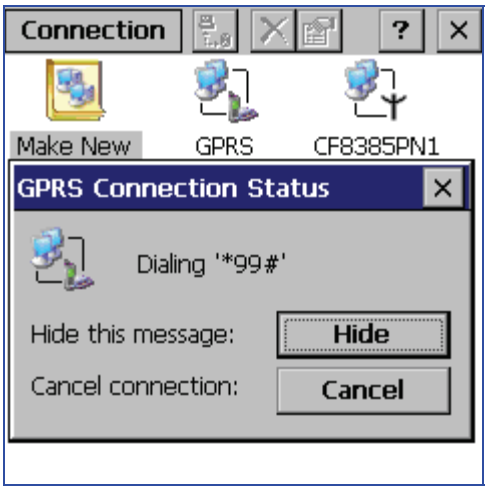

3. It shows below figure when connected to GPRS service.

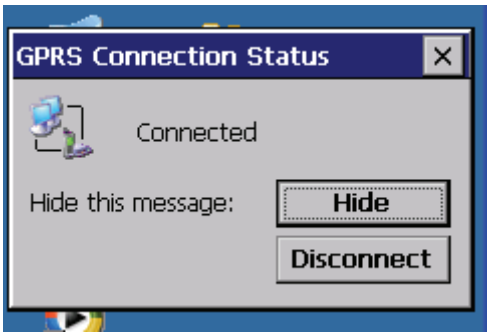

Disconnect GPRS Service

1. Double click the connection icon in taskbar.

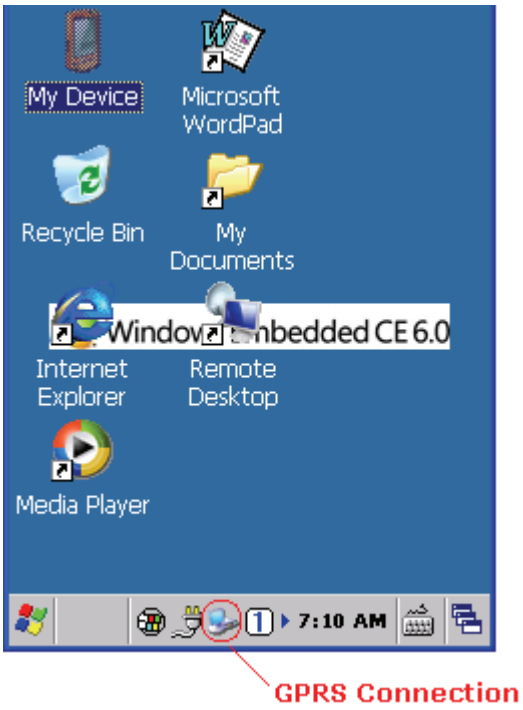

2. Press the “Disconnect” button.

Using the Zebex PowerPack

To save your time and effort in developing applications on Z-2065, ZEBEX provides it's own design system management tool to called "PowerPack" to let you control it directly.

The PowerPack management tools which installs in each of our WinCE product. It is free charge for you. We offer several function for let you control your device without any programming.

Backlight

This application is set up the Backlight of LCD Panel and Key pad. It allows operators to set backlight duration, and also backlight can be set up as On & Off.

The Backlight Setting screen including 2 parts:

- LCD Panel
- Keypad

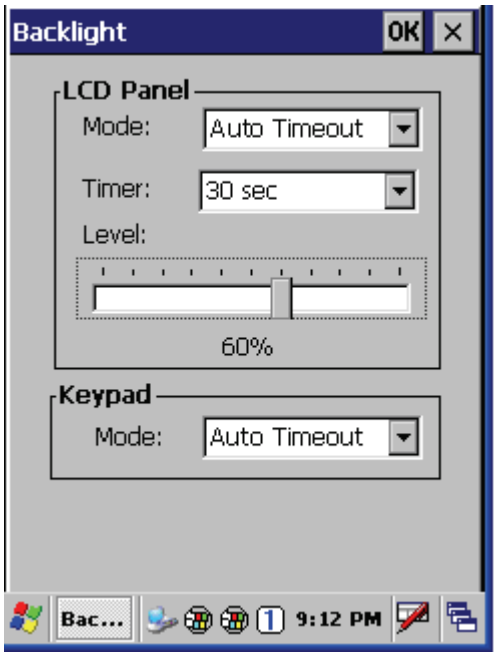

The LCD Panel setting:

- Auto Timeout: This function can be used to set up the LCD backlight to be auto off after certain period of inactivity. You can set up the Auto off time from 15 sec to 15 min using the Timer setup as illustrated below.

- Always ON: This function can set up the backlight to be always on until the system goes into suspend mode.

- Always OFF: This function can set up the backlight to be always off.

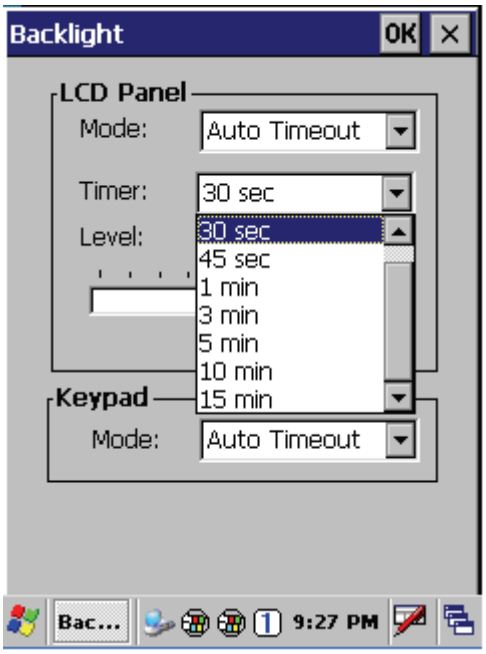

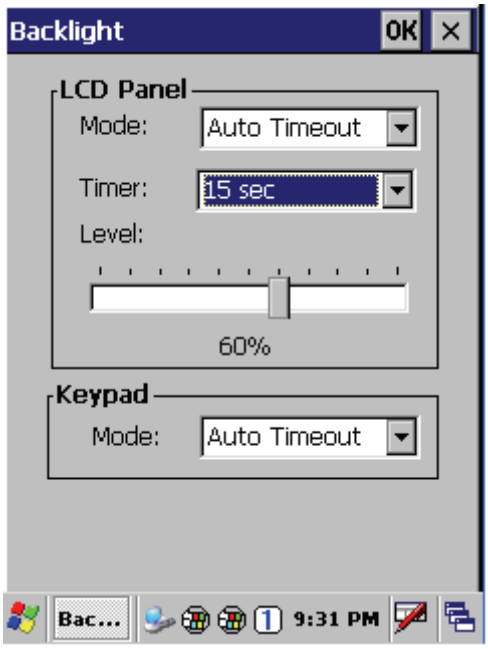

The Keypad Backlight setting:

- Auto Mode: This function can be used to set up the keypad backlight to be auto off after certain period of inactivity. The interval of the time for auto off is fixed on 5 seconds.

- Always ON: This function can set up the keypad backlight to be always on until the system into suspend mode.

- Always OFF: This function can set up the backlight to be always off.

Calculator

This calculator function allows operators to add, subtract, multiply, and divide that simply provide basic logistic function in our daily basis.

The upper zone of the display area displays the memory content, and the lower zone is key pad.

Button description:

MC : Clear buffer of memory.
MR : Got the value of buffer.
MS : Storage the value to buffer.
M+ : Append the value to the buffer.
CE : Clear the display area to “0”, but keep the value in buffer.
C : Clear the display and the buffer of memory.
+/- : Change the value sign form Plus to Minus or Minus to Plus.
0~9 : Numeric key.
/ : Division function.
∗ : Multiplication function.
— : Subtraction function.
＋ : Addition function.
. : A decimal point of dot.
＝ :To be equal to, The amount.

File Transfer

File Transfer is a simple file transferring function tool, the tool can transfer file to another devices via Bluetooth. Communication agreement of file transferring was adopted with OBEX agreement which shared with cell phone or Notebook PC. So you can simply use this function to transfer file to cell phone or Notebook PC, or doing file transferring between two terminals.

File Transfer is capable to auto-search devices with Bluetooth communication, so all devices within valid range will be listed in window of “1. Select Remote Device”.

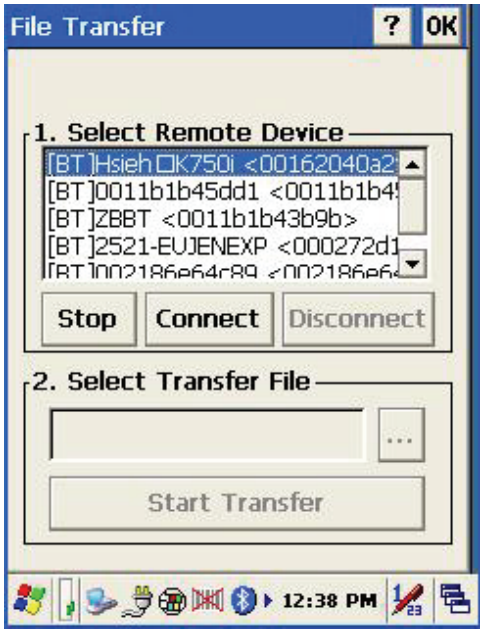

Function Instructions:

1. Select Remote Device
   All devices with Bluetooth Communication functions are listed on the display.

   Query : For searching usable devices.

   Stop : Stop searching.

   Connect : For connecting with one device.

   Disconnect : For disconnecting with current devices.

2. Select Transfer File
   Select file need to be transferred, press bottom for selecting file.
3. Start Transfer : Start transferring file to targeted devices.

Ex. File Transferred Operation By Using Bluetooth

File Transferring by using Bluetooth:
Make sure Bluetooth devices was activated, Bluetooth Communication Devices can be activated under Switch Function within PowerPack software utilities.

1. Select “Query“ for searching Bluetooth devices, below window will pop up on display.

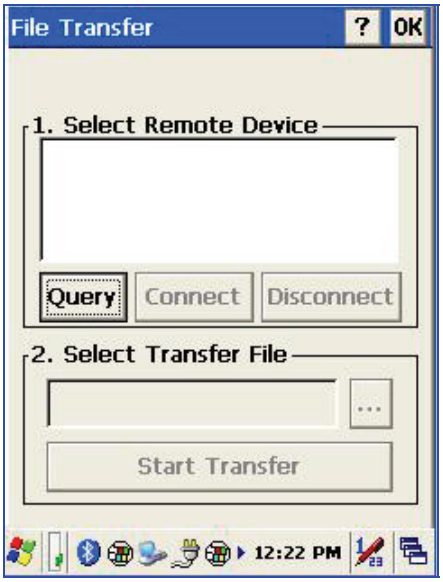

2. Select Bluetooth devices for receiving file, select “Connect” for connecting with devices, or select “Disconnect” to disconnect with current devices.

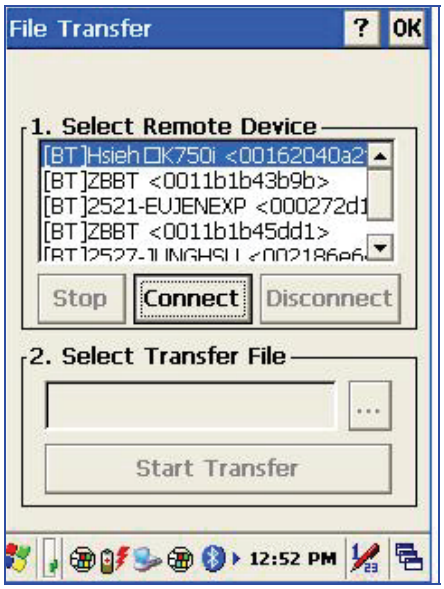

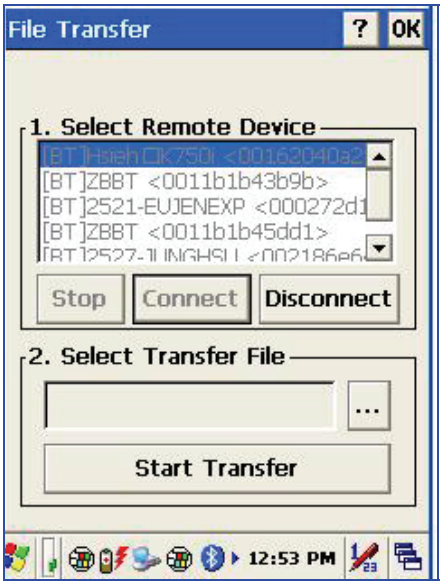

3. Click ” … ” bottom to select the file need to be transferred, then click ”OK ” bottom to confirm.

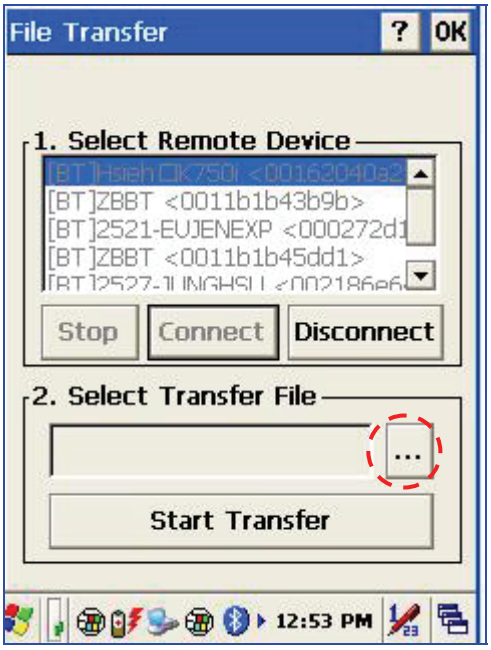

4. Select “Start Transfer” bottom to start file transferring.

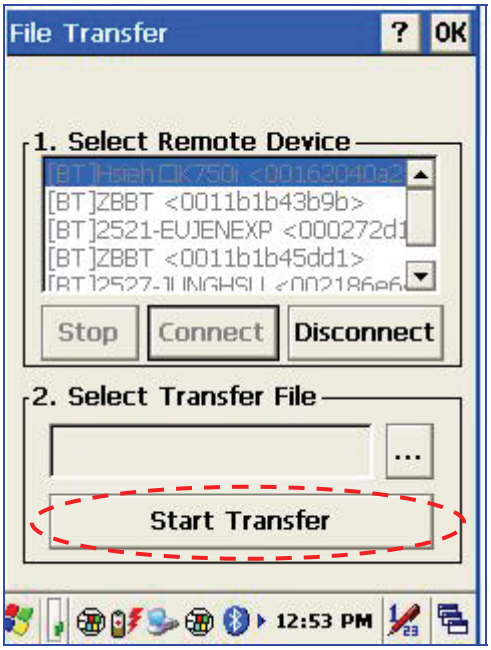

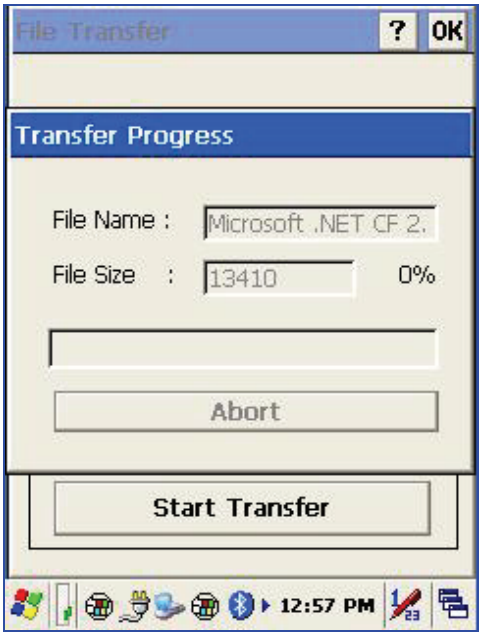

Function Key Manager

This application utility is provides you an easier way to set up function key for your device. Through using this function key set up utility you will easily and quickly to start the application program like, Window Media Player, Calculator… etc, or your own designed application program, and even the windows system function, like increasing or decreasing the volume or doing the adjustment of brightness on LCD panel.

You can find this application is located on path “\settings\control Panel\”.

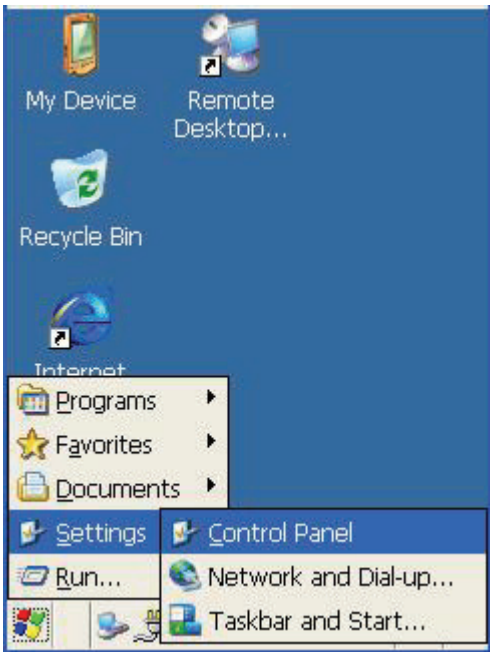

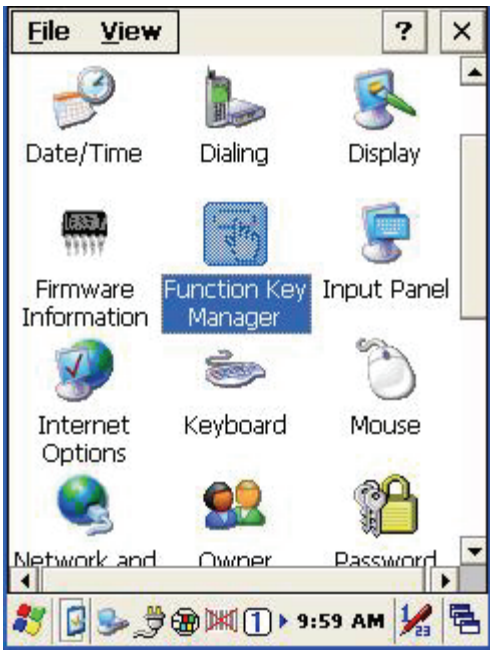

Program provides eight different function key (F1~F8) for set up, default setting was shown as below:

F1: SIP ON/OFF。
F2: Backlight Manager。
F3: Power Switch。
F4: Calculator.exe。
F5: Volume + 。
F6: Volume -。
F7: Backlight +。
F8: Backlight -。

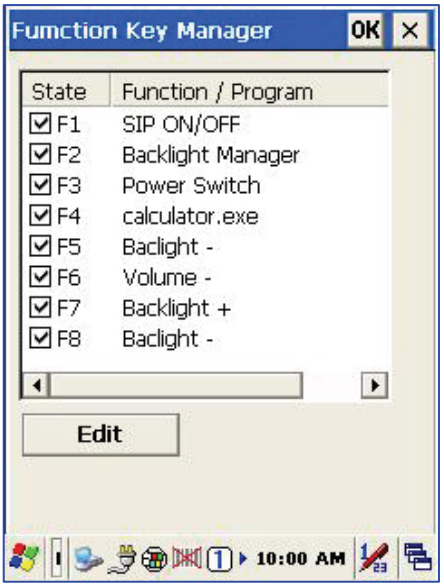

Function Key Manager Set Up Instruction

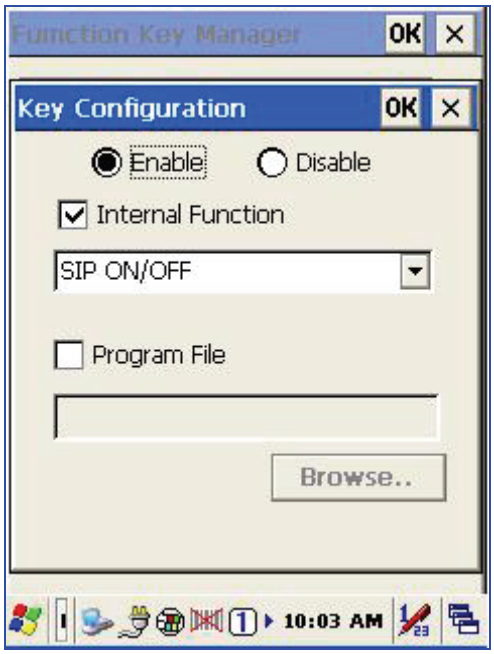

Enable/ Disable : Enable or Disable Function Key.

Internal Function :

- SIP ON/OFF
- Backlight Manager
- Power Switch
- Stylus Calibration
- Wi-Fi ON/OFF
- Bluetooth ON/OFF
- Volume +
- Volume –
- Backlight +
- Backlight –
- Cut
- Copy
- Paste

Program File : Install application program according to demand, this function can be used for setting up auto-execution.

Edit Internal Function items:

1. Select items need to be modified, select by clicking ”Edit” bottom to enter set up window as below:

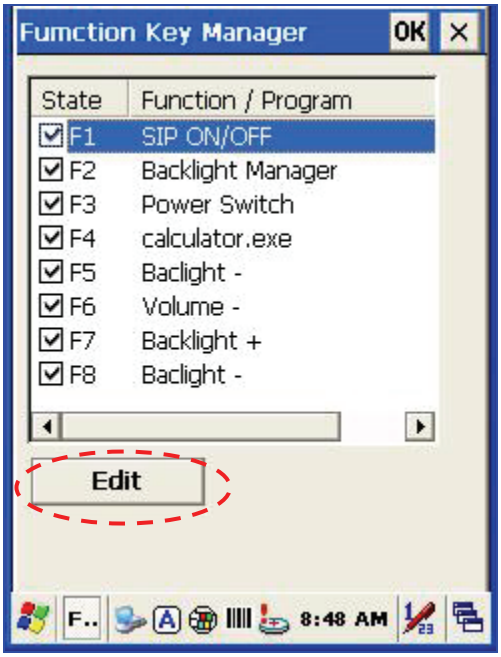

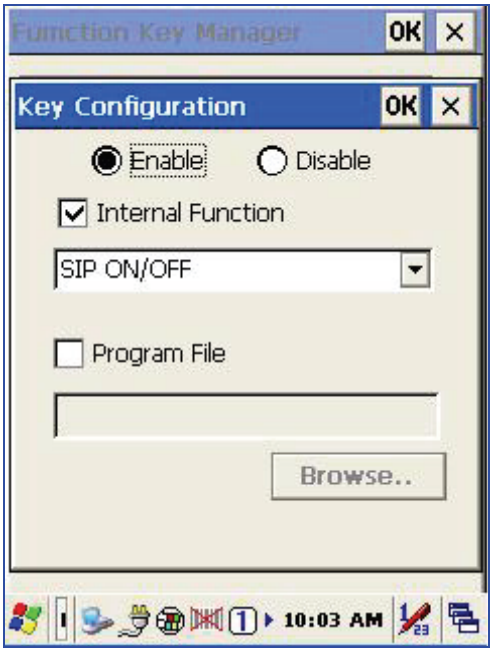

2. Select new functional item and complete editing.

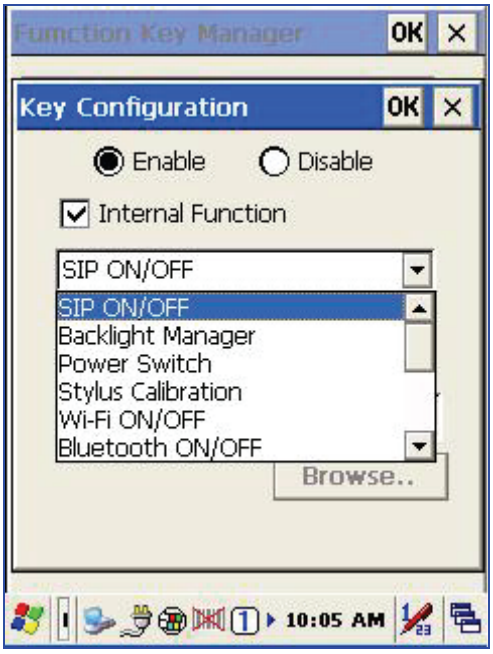

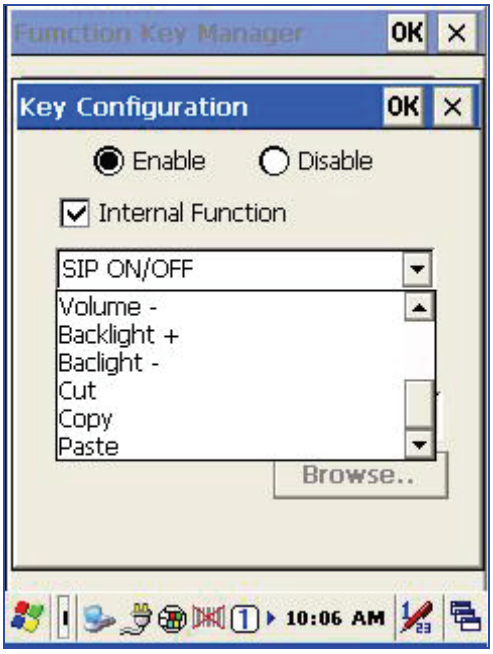

Edit application software for auto-execution:

1. Select Program File item，then click ”Browse” bottom to enter File
2. Opening Window.

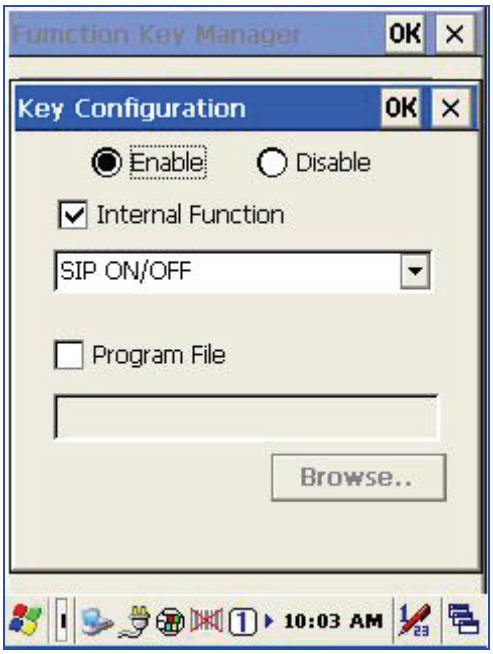

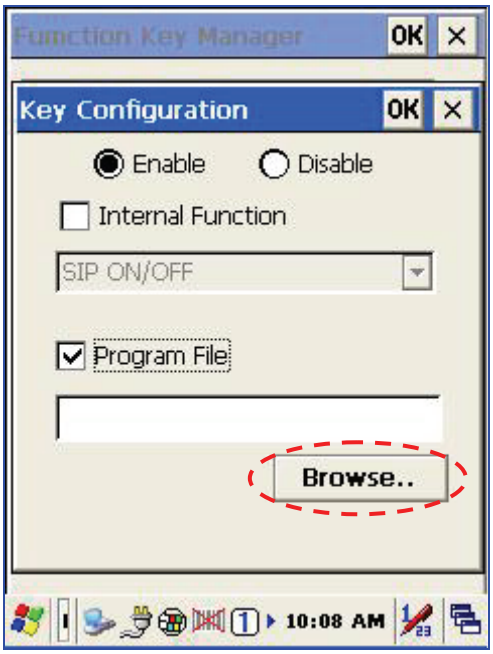

3. Select software required auto-execution, then select “OK” bottom to complete selecting process.

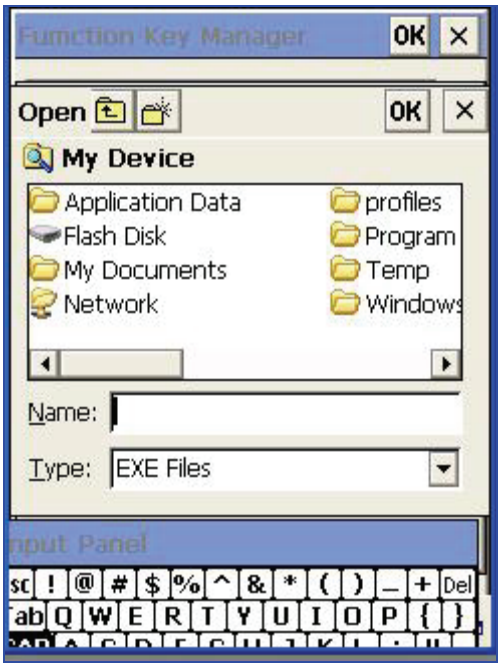

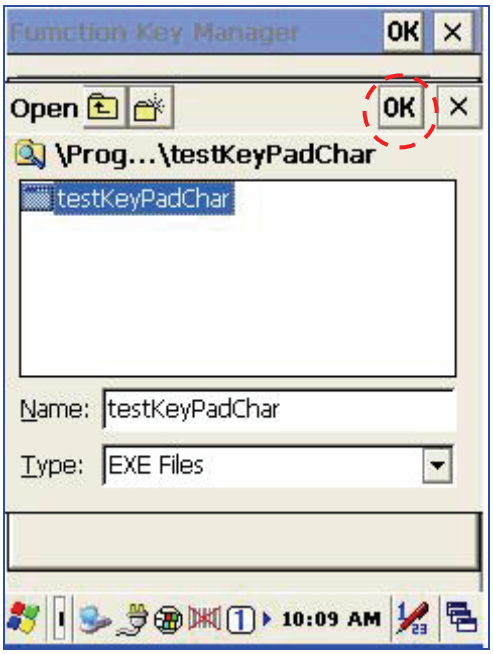

4. Confirmed Function / Program had been updated within column. Select by clicking ”OK“ bottom to complete editing process. When Function Key Manager Main Page reappear on the display, F1 on function key item lists had been updated to testkeypadChar.

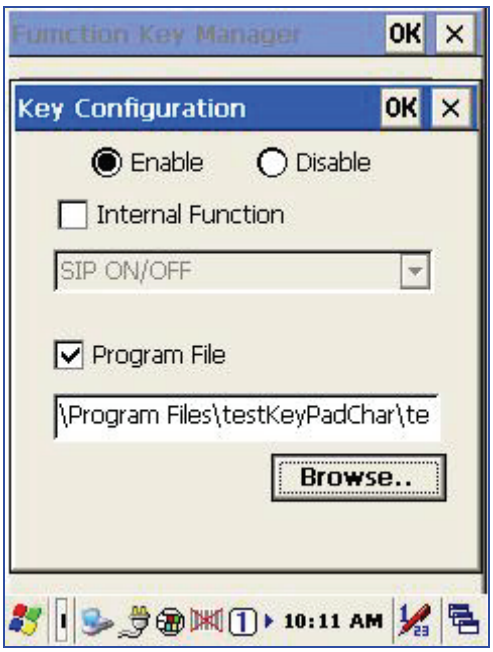

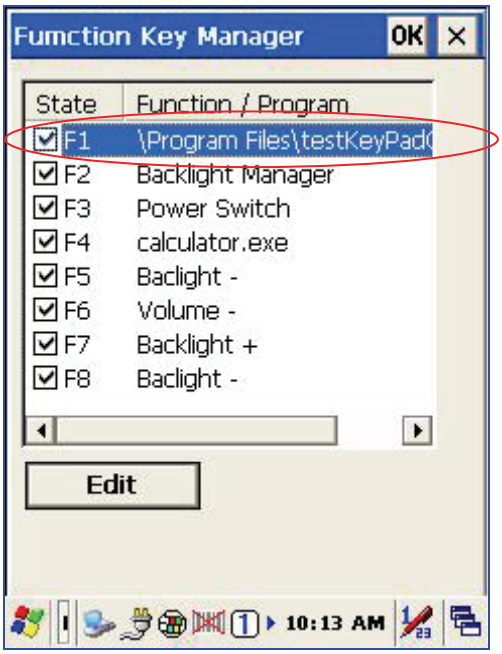

GPS Information

The GPS Information allows operators to view GPS status and to setup the GPS function during suspension.

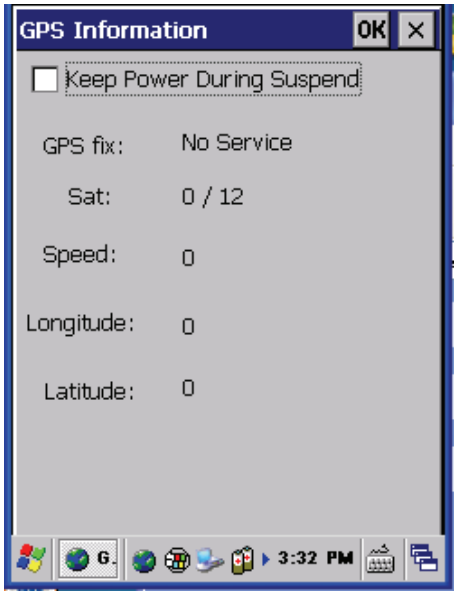

Check/uncheck the “Keep Power During Suspend” check box to enable/disable the function.

Preload Manager

The Preload Manager is an auto execution program after system boot for ZEBEX's WinCE device. You may set programs into the Preload list box and running the program by automatically or manually.

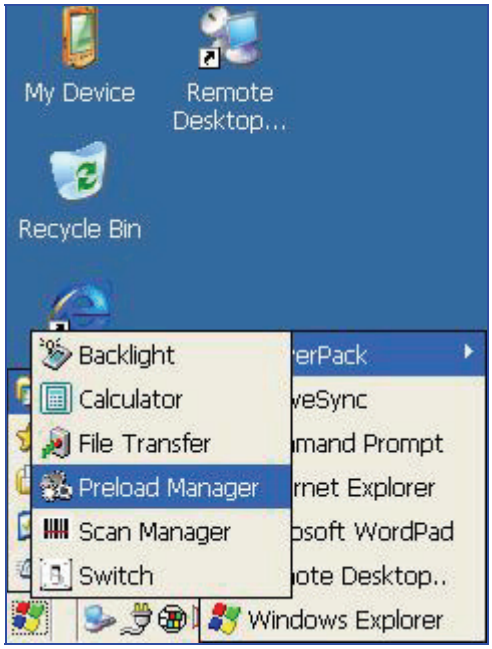

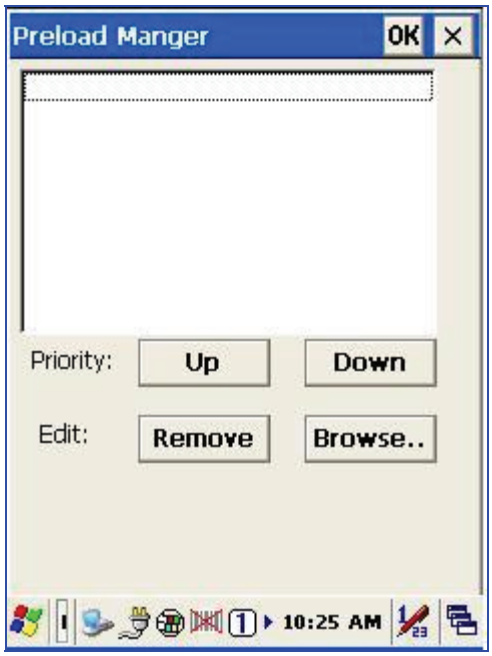

Modify Window located on top of display, providing functionalities of Priority, Remove and Browse.

- Priority : Providing "UP"and "DOWN" two bottoms for adjusting priority on the lists.
- Edit : Providing "Remove" and "Browse.." two functionalities, below are instructions:
- Remove：Deleting selected functionalities.
- Browse.：Selecting program for preloading, files can be selected from window by clicking Browse bottoms.

Preload Operation

Selected Program:

1. By clicking ”Browse..”, below menu will appear, select preload program by using folder. Programs can be selected more than once.

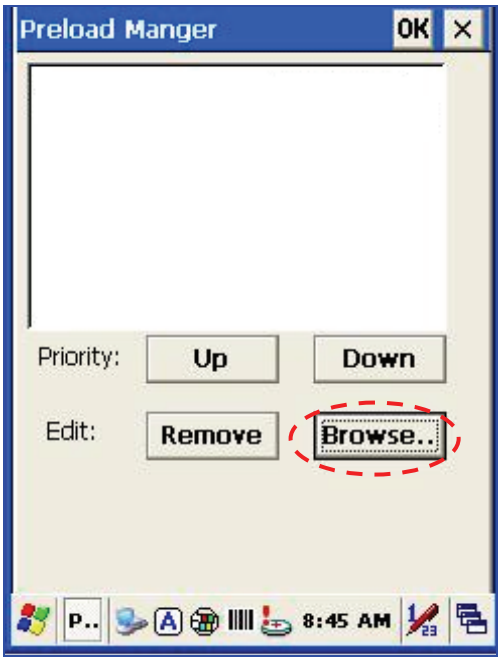

2. Confirming file by clicking “OK” will get back to Preload Manager main page. Then complete its process.

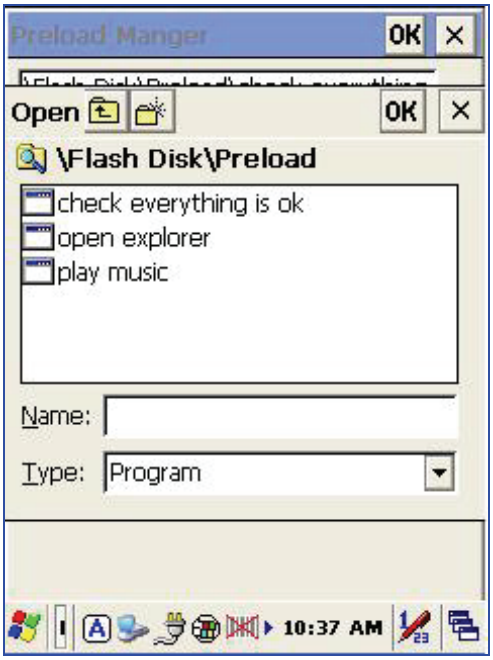

Reset preload priority:

If the preload priority need to be set up to (1)play music -> (2)open explorer -> (3)check everything, please follow steps listed below :

1. Select by clicking play music.exe program and click ”Up” bottom to move up the music.exe.
2. Then select by clicking check everything program and click “Down” bottom to move down check everything program.

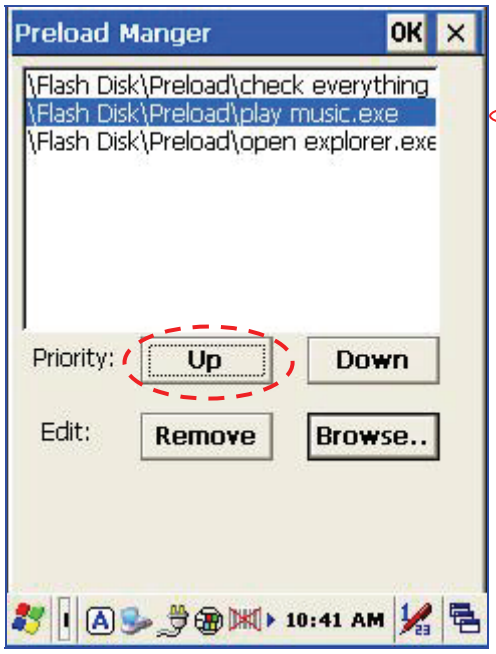

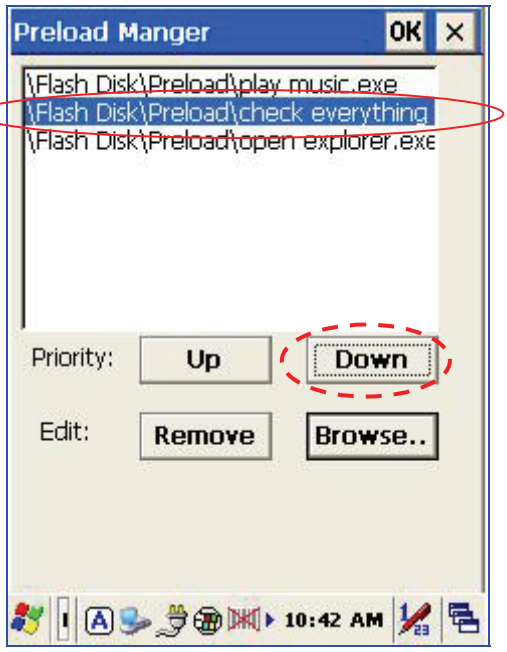

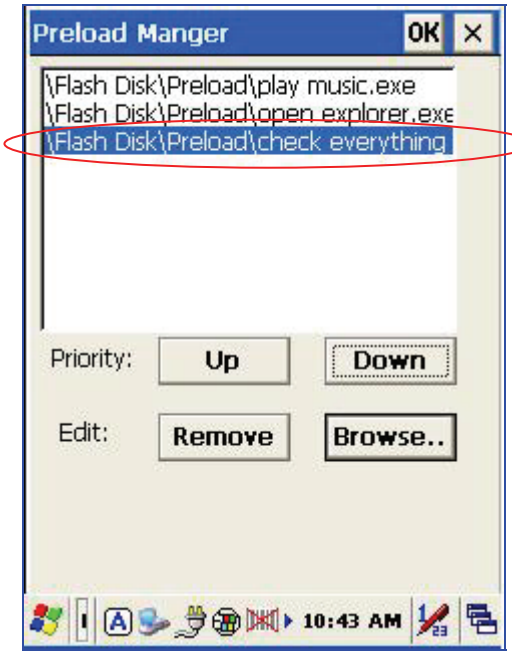

Remove a program:

In order to remove “open explorer” program, select by clicking program, then select “Remove” by clicking on bottom to finish command.

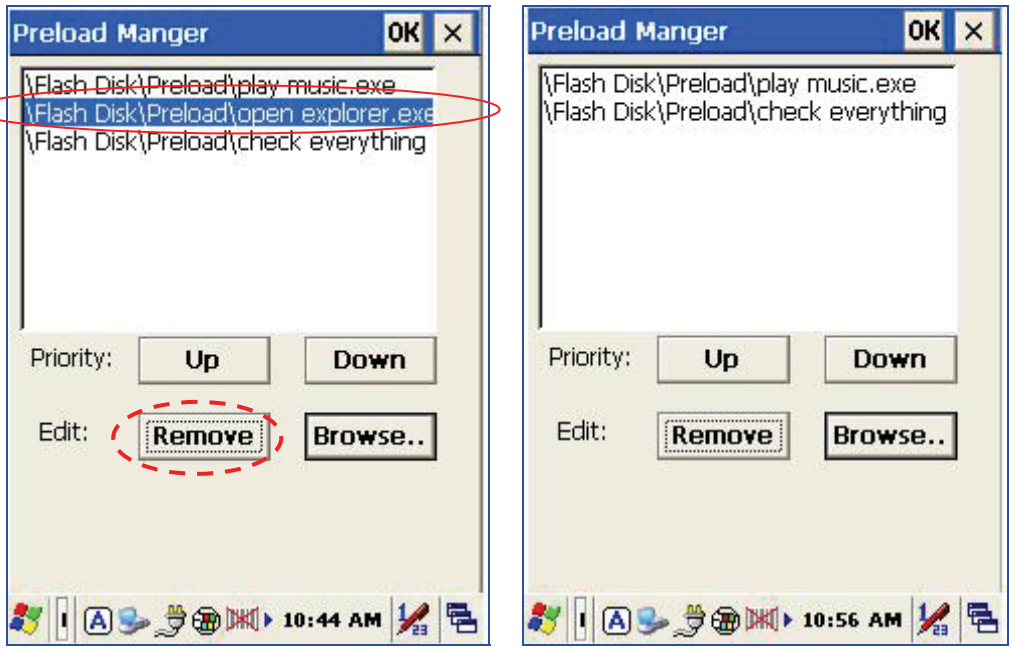

RFID

Please see Using RFID Scanner (Optional) for more information.

Switch

The WiFi, Bluetooth, and GPS switch utility. This application provides as a switch function to let you easily turn on or off the function and power for WiFi Bluetooth, and GPS interface. Window for setting up Wifi will pop up by double-clicking small icon within red circle which shown as below diagram.

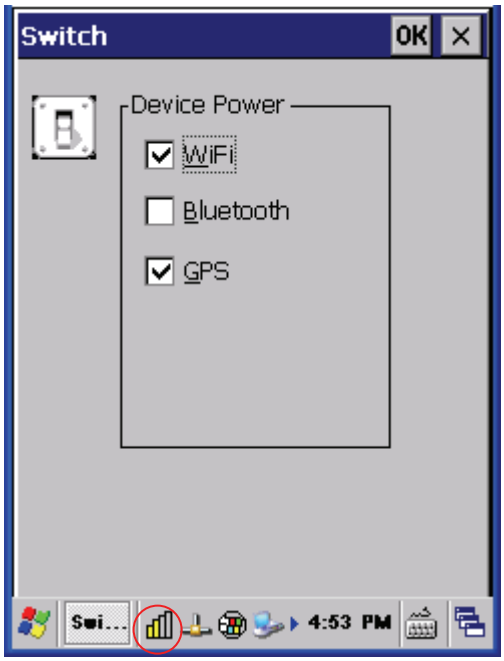

Under the content of “Profile”, the available wireless network access point will be searching by clicking “Scan” button. You can select an access point and press “Configure” button to connect with that network.

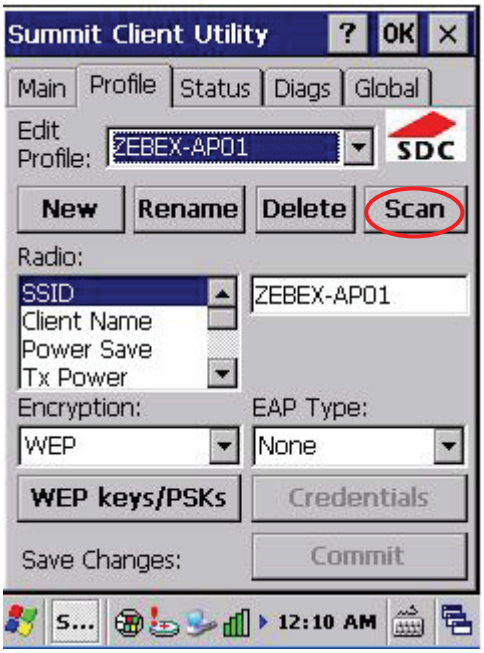

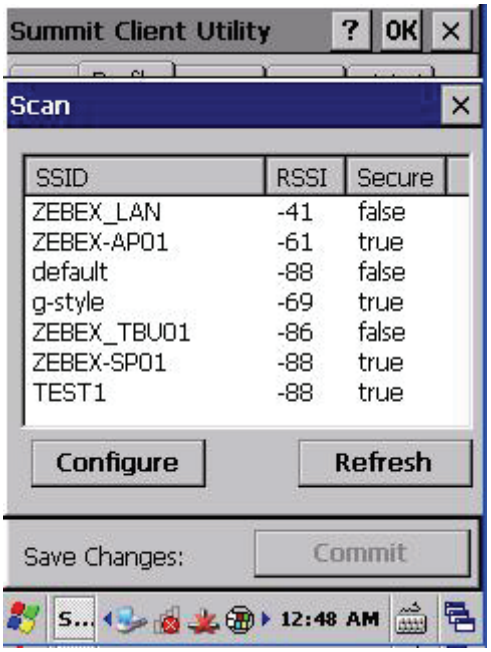

Existing access point can also be selected from Edit Profile shown as below diagram.

Under content of main menu, existing profile (WiFi) can be set up as Auto Profile. Existing Profile lists can be viewed existing profile by clicking “List” button, check profile and click on “OK” button. Select “On” from Auto Profile menu to complete Auto Profile setting.

Scan Manager

The Scan Manager program is a barcode reader set up program, it offers you an easy way to enable or disable the barcode scanner, and also offer you to set up each barcode symbolic properties.

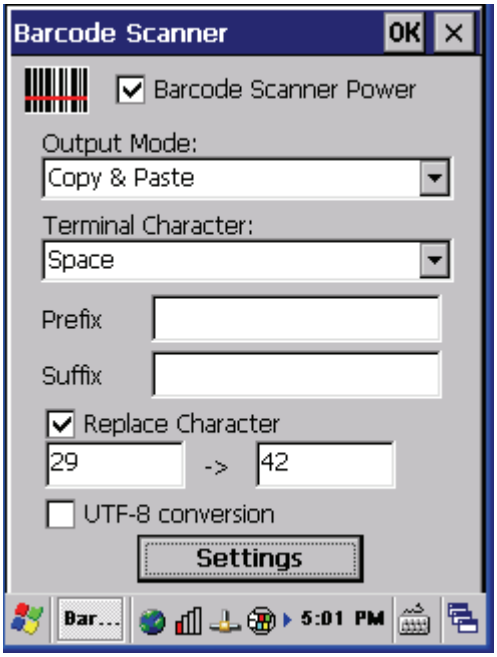

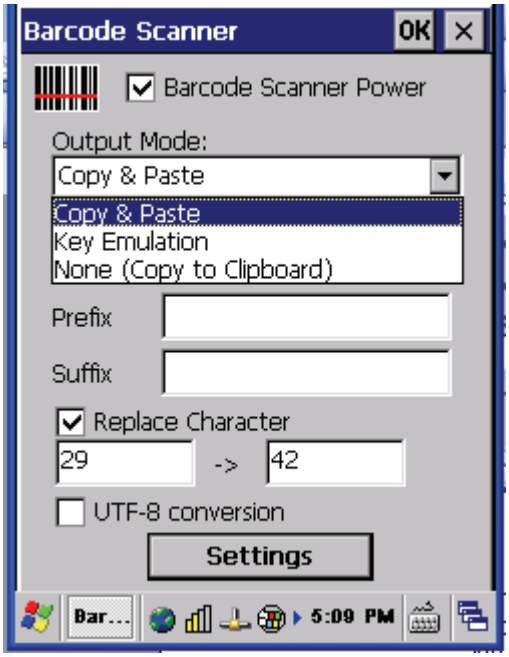

Below are instructions of functions on main page:

Output Mode: provides three output methods such as Copy & Paste / Key Emulation / None (Copy to Clipboard).

- Copy & Paste: Copy and paste the barcode information into application that need to execute data as input. (ex. WordPad)
- Key Emulation: Transfer barcode information via Key Emulation to executed software's edit window. Key Emulation function can also be used for barcode scanning under conditions of Terminal Emulation, Command Prompt and some other program without touch panel. Read data will be transferred to application program.
- None(copy to clipboard): Function provide required barcode information to application program, after this function was activated, scanner will read barcode information and save data into clipboard.

- Terminal Character: Set the terminator control code with barcode data. It offers “Enter”, “Space”, “Tab”, and “None” for selections. Terminator control code will be sent every time when barcode was read.

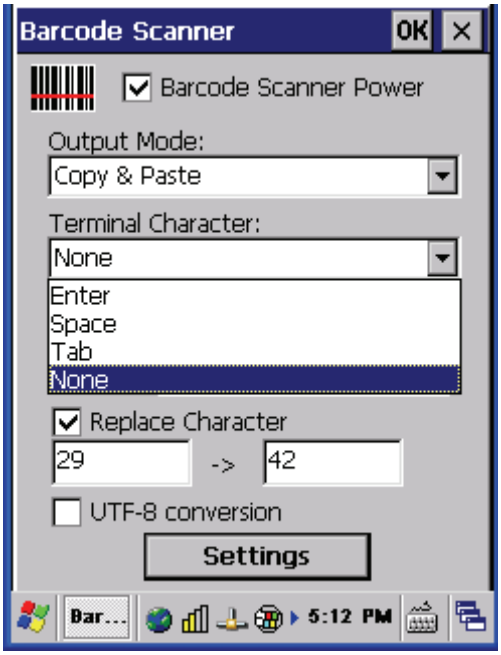

- Replace Character: Enter the value then check/uncheck to enable/disable the function.
- UTF-8 conversion: Check/uncheck to enable/disable the function.
- Suffix: Set the suffix character with barcode data.
- Prefix: Set the preamble character with barcode data.

- Setting: To set the barcode parameter value of each kind of barcode for barcode scanner. Press the "Setting" button in the application to start the barcode setting.

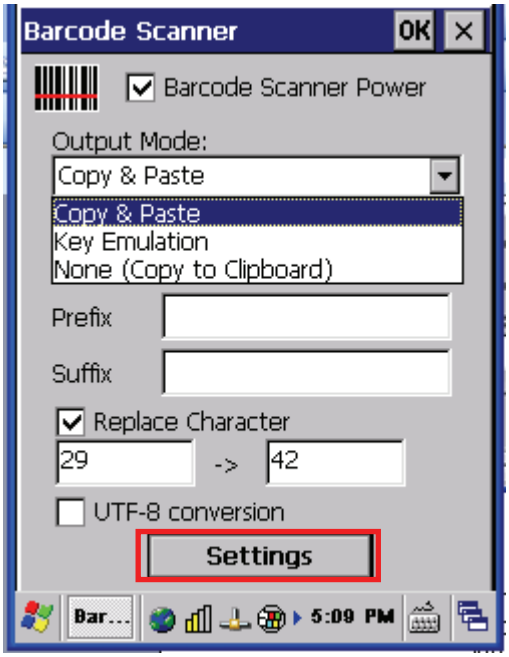

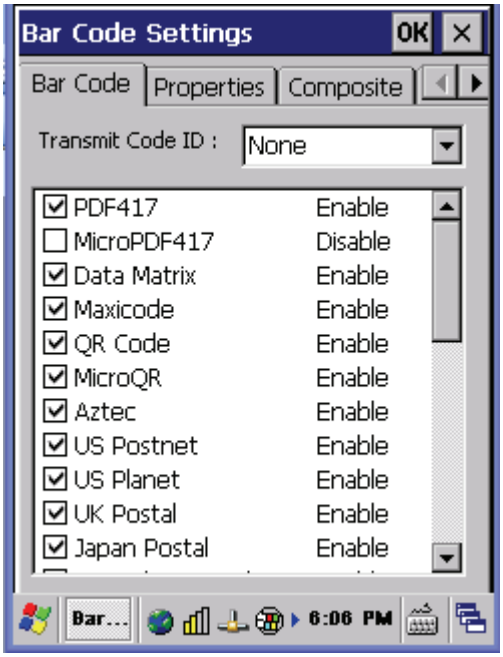

To check the barcode type selection for enable the type of barcode for read, press the "Properties" tab on top to see the barcode parameter value of each kind of barcode.

The default values of EAN/UPC code and Code39:

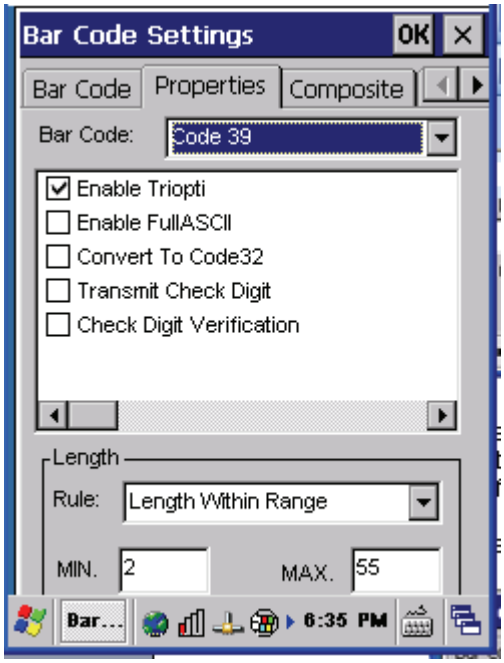

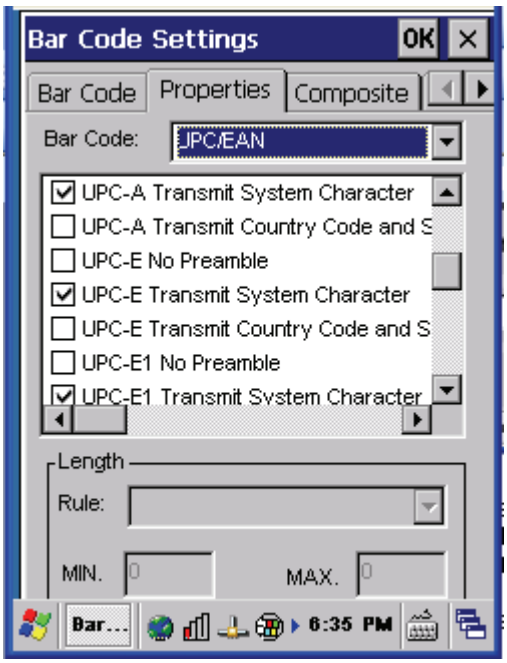

Backup/Restore

You can find this application is located on path “\settings\control Panel\”.

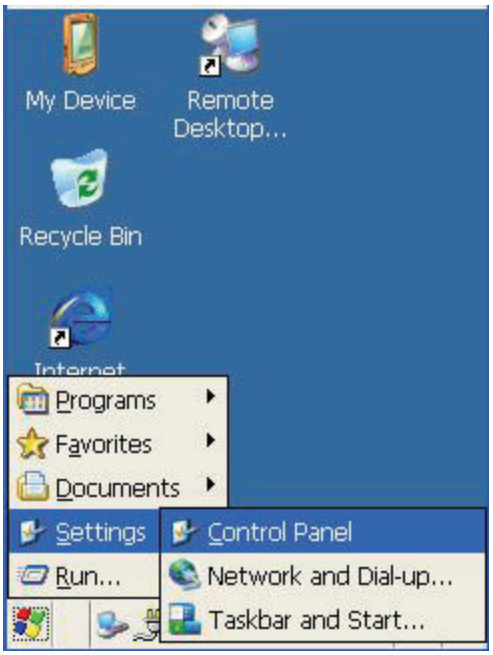

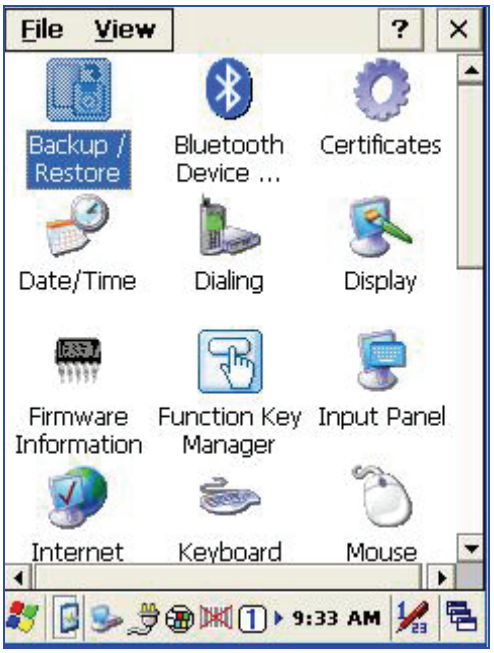

This application provides you an easy way to backup or restore the device setting information into Flash Disk and storage card. Application also provides selection of Flash Disk when there is no storage card. When Mini SD Card was installed into devices, program will auto-search and provides selection of SD Card from menu.

- Backup: Select backup data as saved devices, press ”Backup” bottom to proceed backup. Display will restore when backup was finished.

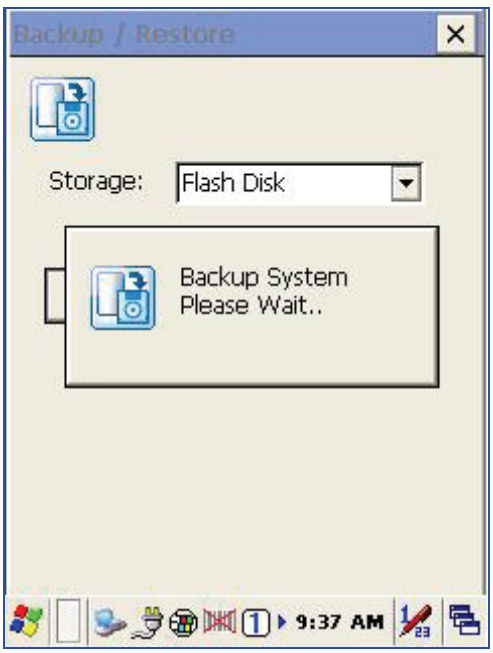

NOTES

- Barcode settings are not backed up by this function. To back up your barcode settings please use barcode setting->Export/Import Setting.
- Backup time may vary depending on the size of data you have on the device.
- When restoring system, you must select “Yes” to warm boot the device to complete the process.

Firmware Information

This application will check and display the version information of the device's operation system and PowerPack utility.

You can find this application is located on path " \settings\control Panel\".

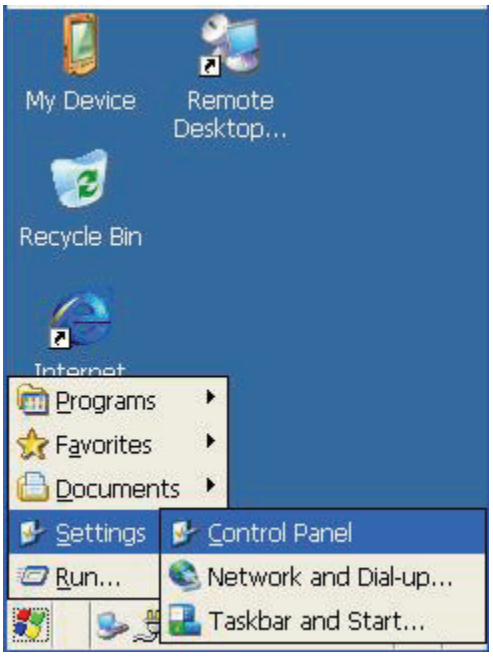

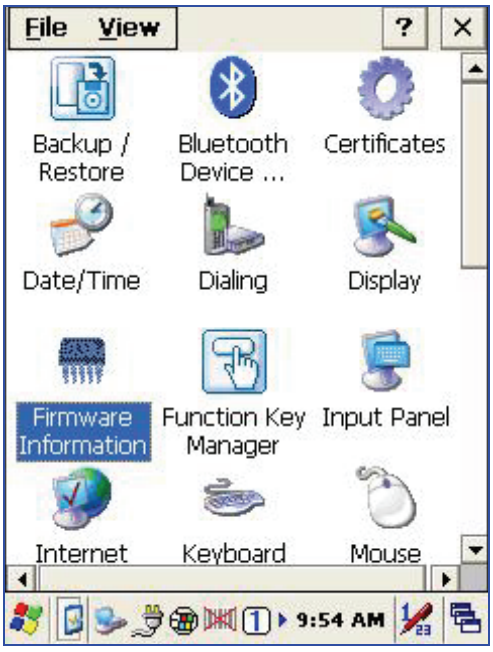

This information is good for identify device firmware version for future update or maintenance.

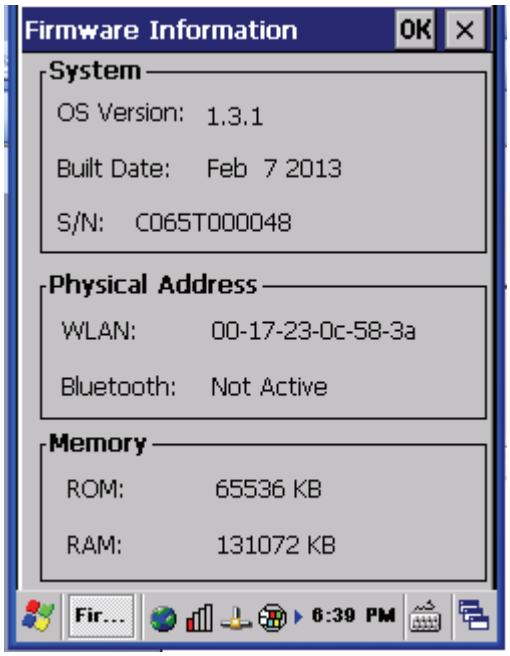

How to order

Please offer Part Number or Model Name for next purchase.

1. Z-2065 Series Windows CE.NET Handheld Computer Set.

Part Number	Model Name	Description
882-65W100-100	Z-2065WL1	WindowsCE.NET Handheld Computer, W/Wireless LAN/BT module/1D engine/RS-232 DB9(F) cable / USB interface
882-65W200-100	Z-2065WL2	WindowsCE.NET Handheld Computer, W/Wireless LAN/BT module/2D imager/RS-232 DB9(F) cable / USB interface
882-65W1GS-100	Z-2065W1GS	WindowsCE.NET Handheld Computer, W/Wireless LAN/BT/GPRS/GPS module/1D engine/RS-232 DB9(F) cable / USB interface
882-65W2GS-100	Z-2065W2GS	WindowsCE.NET Handheld Computer, W/Wireless LAN/BT/GPRS/GPS module/2D imager/RS-232 DB9(F) cable / USB interface
882-65G1SH-100	Z-2065W1GSH	WindowsCE.NET Handheld Computer, W/Wireless LAN/BT/GPRS/GPS module/1D engine/RFID(H)/RS-232 DB9(F) cable / USB interface
882-65G2SH-100	Z-2065W2GSH	WindowsCE.NET Handheld Computer, W/Wireless LAN/BT/GPRS/GPS module/2D imager/RFID(H)/RS-232 DB9(F) cable / USB interface
882-65W1G0-100	Z-2065W1G	WindowsCE.NET Handheld Computer, W/Wireless LAN/BT/GPRS module/1D engine/RS-232 DB9(F) cable / USB interface
882-65W2G0-100	Z-2065W2G	WindowsCE.NET Handheld Computer, W/Wireless LAN/BT/GPRS module/2D imager/RS-232 DB9(F) cable / USB interface
882-65W1S0-100	Z-2065W1S	WindowsCE.NET Handheld Computer, W/Wireless LAN/BT/GPS module/1D engine/RS-232 DB9(F) cable / USB interface

882-65W2S0-100	Z-2065W2S	WindowsCE.NET Handheld Computer, W/Wireless LAN/BT/GPS module/2D imager/RS-232 DB9(F) cable / USB interface
882-65W1H0-100	Z-2065W1H	WindowsCE.NET Handheld Computer, W/Wireless LAN/BT module/1D engine/RFID(H)/RS-232 DB9(F) cable / USB interface
882-65W2H0-100	Z-2065W2H	WindowsCE.NET Handheld Computer, W/Wireless LAN/BT module/2D imager/RFID(H)/RS-232 DB9(F) cable / USB interface

Standard Accessories		
170-70R449-180	RS-232 Cable	RS232 charging cable for Z-2050/2065
173-0U0000-150	MINI USB Cable	Terminal to PC USB port
862-206502-400	Battery Pack	Lithium-Ion rechargeable battery pack, 3.7V 5000 mAh
560-820500-741	Stylus Pen	Length: 95.7cm, including reset thimble
623-220500-061	Sling	Sling for stylus pen
623-220650-051	Hand Strip	Z-2065 hand strip and stylus pen holder
560-020650-891	Hand Strip Holder	Z-2065 hand strip holder
11S-900180-008	AC Adapter	AC 100~240V 50/60HZ 0.6A, DC 9V/2A
11S-000000-008	Integrated Plug head	for 11S-900180-008 Type: Britain/ U.S./Australia/Europe

2. CRD-60 Communication and Battery charging Cradle Set.

Part Number	Model Name	Description
882-60CR00-000	CRD-60	Z-2065 communication and battery charging cradle
Standard Accessories		

174-1RF050-150 RS-232 Cable

RS232 cable connect from CRD-60 to PC RS-232 Dsub port.

PIN-OUT configuration	
DB-9(F)	
1	CD (Carrier detect)
2	TxD (Transmit data)
3	RxD (Receive data)
4	DSR (Data set ready)
5	GND (Signal ground)
6	DTR(Data terminal ready)
7	CTS (Clear to send)



PIN-OUT configuration	
1	NC
2	TxD (Transmit data)
3	RxD (Receive data)
4	NC
5	GND (Signal ground)
6	NC
7	CTS (Clear to send)
8	RTS (Request to send)

173-0U3000-150 USB Cable

RJ45 USB type B cable connect from CRD-60 to PC USB port.

3. Z-2065 Series Optional Accessories

	Part Number	Model Name	Description
	170-70R449-180	RS-232 cable	RS232 charging cable for Z-2050/2065

PIN-OUT configuration	
DB-9 (Female)	
1	CD (Carrier detect)
2	TxD (Transmit data)
3	RxD (Receive data)
4	DSR (Data set ready)
5	GND (Signal ground)
6	DTR (Data terminal ready)
7	CTS (Clear to send)
8	RTS (Request to send)
9	RI (Ring indicator)

	173-0U0000-150	MINI USB Cable	Terminal to PC USB port
	174-1RF050-150	RS-232 Cable	RS-232 cable connect from CRD-60 to PC RS-232 Dsub port.
	173-0U3000-150	USB Cable	RJ45 USB type B cable connect from CRD-60 to PC USB port.
	862-206502-400	Battery Pack	Lithium-ion rechargeable battery pack, 3.7V, 5000mAh
	560-820500-741	Stylus Pen	95.7mm, including reset thimble

	Part Number	Model Name	Description
	623-220500-061	Sling	Sling for stylus pen
	623-220650-051	Hand Strip	Z-2065 hand strip and stylus pen holder
	560-020650-891	Hand Strip Holder	Z-2065 hand strip holder
	862-206502-400	AC Adapter	AC 100~240V 50/60HZ 0.6A, DC 9V/2A
	11S-000000-008	Adapter Head	Britain type head ,interchangeable plug, for 11S-900180-008 AC adapter
	11S-000001-008	Adapter Head	U.S. type head ,interchangeable plug, for 11S-900180-008 AC adapter
	11S-000002-008	Adapter Head	Australia type head ,interchangeable plug, for 11S-900180-008 AC adapter
	11S-000003-008	Adapter Head	Europe type head ,interchangeable plug, for 11S-900180-008 AC adapter

<< MEMO >>